



Manufacturer of Quality Farm Equipment



2020 CATALOG

YOU ARE ALWAYS WELCOME AT
Roll-A-Cone Mfg. 7655 Roll-A-Cone Rd Tulia, TX 79088

Phone: 806-668-4722 Fax: 806-668-4725 Web Page: www.roll-a-cone.com E-mail: rollacone@roll-a-cone.com

4 Bar Hoeme.....	3
A-Frame Hitches.....	16
Angle Clamps.....	26,27
Back Packer.....	3
Badger 3-Pt Plow.....	6
Badger Bedder.....	7
Badger Claws.....	29
Bale Haulers.....	21
Bale Prongs & Holders.....	32
Barring Off Disc.....	38,41
Baskets.....	33,35,36
Bedder Buster 8-Row Plow.....	6
Bedder Buster Shank Assembly...	29
Bed Master.....	7
Bed Roller.....	9
Blades.....	43,44
Camel Back.....	21
Caps.....	22
Coulter Chopper.....	4
Cone Guide Wheel.....	41
Corn Lifters.....	47
Coulters.....	36,37,38
Crumbler.....	3
Cultivators.....	5,8
Cylinders.....	21
Dirt Pusher.....	35
Disc Bedder.....	7
Disc Bedder Rows.....	30
Double Bar Frames.....	10-13
Double T-Bar Frame.....	12
Fenders.....	39
Fertilizer Equipment.....	45,46
Fertilizer Rig.....	8
Field Cultivator.....	5
Folding Plow Frames.....	13
Footpieces.....	40
Gauge Wheels.....	23,24
Heavy Hinges.....	14
Hitches.....	15,16
Hoeme 3-Pt Plow.....	4
Hoeme Chisels.....	43
Hoeme Shank Holders	26,27

Hoeme Shank.....	40
Hoeme Shank Wear Shin.....	45
Hook Badger Plow	4
Hub Assemblies.....	42
Hydraulic Rod Weeder.....	9
Hydraulic Row Markers	20
Inner Row Ripper	6
Knife Attachment.....	44
Knife Heads	34
Lister Bottoms	44
Marker Disc Assembly	35
Marker Tire	35
Marker Wheel	35
Markers	20
Maxi Picker.....	38
Mini Picker.....	38
Offbar.....	31
Peel Off Disc.....	31
Planter Guide.....	41
Plow Extensions.....	14
Plow Frames (4x4).....	10
Plow Frames (4x7).....	11
Plow Hydraulics.....	14
Plow Stands.....	38
Pull Pins.....	22
Rake Attachments.....	32
Rakes w/ Baskets.....	32
Rake Teeth	33
Razor Plow.....	4
Razor Plow Shank.....	28
Rear Stabilizer	31
Replacement Jacks	39
Replacement Points.....	45
Replacement Shins	44
Rod Weeder.....	9
Rod Weeder Attachments.....	34
Rod Weeder Knife Head.....	34
Roll-A-Picker	8
Rolling Cultivator Gang.....	31
S Crank.....	39
Shank Holders	25,26,27
Shank Holder Ext.....	25
Shanks.....	28,29,40

Shaper Rings.....	9
Single Bar Frames.....	10
Single Bar HD Frames.....	11
Sliding Fender.....	39
Spacers.....	17
Spider Diker.....	6
S-Shank.....	29
S-Shank Clamp.....	26
Spring Load Basket.....	33
Spring Tine Clamp.....	26
Spring Tine Plow.....	3
Spring Tine Shank.....	29
Squirrel Cage.....	35
Stalk Cutter Units.....	17,18,19
Stalk Puller Row.....	30
Straight Shank Cultivator.....	8
Straps.....	22
Stubble Mulcher Plow.....	5
Stubble Mulcher.....	28
Stubble Mulcher Blades.....	43
Stubble Mulcher Frog.....	39
Subsoil 3-Pt Plow.....	6
Subsoil Shank.....	28
Sweep Buffer Wing.....	42
Sweepmaster Plow.....	2
Sweeps.....	43
T-Bar Plow Frames.....	12
Tipper.....	43
Tool Bar Spacers.....	16,17
Tool Bars & Tubing.....	22
Track Filler.....	8
Track Packer.....	9
Transporting Equip.....	21
Trash Whippers.....	35
Treaders.....	33
Triple Bar Plow Frames.....	10,11,12
Truss Rods.....	14
Turn Row Plow.....	5
U Bolts.....	22
Wire Weeder.....	34



SWEEPMASTER DRAG PLOW

- Available with Single or Double Fold Wings
- Available from 17 to 41 Shanks
- 100# Average Weight on Frame per Foot
- 4x7-3/8 Front Bar & 4x7-3/8 Center Bar
- 4x4-3/8 Rear Bar & 4x4-1/4 Head Bar
- 8000# 8-Hole Hubs on Hyd. Gauge Wheels
- 1-1/2"x2"x30" Shanks 55401
- Heavy 5-Bolt Clamps — No U Bolts
- 26" Sweeps on 20" Centers
- Wide Spaced Frame Measures 86" Front to Rear
- Available up to 72'
- Level Plow from Cab

SPRING TINE DRAG PLOW



- Available up to 65'
- Heavy Duty 4-Bar Frame with
- Front Bar: 4x4x.375
- 2nd Bar: 4x7x.375
- 3rd, 4th, & Head Bar: 4x4x.250
- 8-Bolt 8000# Hubs on Dual Gauge Wheels
- 9" Sweeps on 6" Centers Standard
- Level Plow from Cab
- 18 Ply Tires Rated at 6000 Lbs. Used on Double Fold Plows
- Other options available

4 BAR HOEME



- Available up to 49' Single Fold or 65' Double Fold
- 4 Bar Frame
- 1st & 2nd Bar 4x7-3/8"
- 3rd & 4th Bar on Center Section 4x4-3/8
- 3rd & 4th Bar on Wings 4x4-1/4
- 18" Sweeps on 12" Centers
- 1-1/4x2 Hoeme Shank Standard
- 8000# 8-Hole Hubs on Hyd. Gauge Wheels
- Plow Utilizes Side by Side Gauge Wheels with 12.5L 16 Flotation Tires
- Level Plow from Cab

CRUMBLER



- Available with Gooseneck Hitch on 35' rig or Less
- 4900# 8 hole Hubs Standard
- Most Sizes Available
- Crumbler Units Individually Spring Loaded w/ Rubber Torsion Axle
- Each Crumbler unit is Made with 7/8" Rod on outside diameter with 2" shaft in center
- Crumbler unit is 18-1/2" Diameter
- Crumbler units weigh Approximately 60 #s Per Foot (excluding plow frame)
- Heavy Duty Design with Heavy Duty Hinges
- Uses one Remote to Raise and Fold Plow

BACK PACKER



- Available with Gooseneck Hitch on 35' rig or Less
- 4900# 8 hole Hubs Standard
- Most Sizes Available
- Packer Units Individually Spring Loaded w/Rubber Torsion Axle
- Each Packer Unit is Made of 1-3/4" Solid Square Rolled on a Diamond with a 2" Solid Shaft and 2" Pillar Block Bearing on Each End
- Right and Left Hand Coils
- Packer Units Weigh Approximately 100 #s Per Foot (excluding plow frame)
- Superior Heavy Duty Design
- Heavy Hinges Standard on all Folding Packers
- Uses One Remote to Fold and Raise Plow

RAZOR PLOW



Single Fold 11 Shank 40' shown

- Available with Single or Double Fold Wings
- Available with 9, 11, 15 or 17 Shanks
- 4x7-3/8 Front Bar & 4x7-3/8 2nd Bar
- 4x4-3/8 3rd Bar & 4x4-3/8 Rear Bar
- 4x4-1/4 Headbar
- 8000# 8-Hole Hubs on Hyd. Gauge Wheels
- C-1060 Shank Mat. Mounts with 1" Bolts to 4x6x1/2 Angle Iron Clamps
- Heavy Duty 5-Hole Swivel Coulter in Front of Each Shank
- Shanks on 44" Centers with 48" Blades 6" Mat.
- Level Plow from Cab
- 18 Ply Tires Rated at 6000 Lbs. Used on Double Fold Plows

HOOK BADGER DRAG PLOW



- Available up to 45' Width
- 4 Bar Frame
- 1st & 2nd Bars 4x7-3/8
- 3rd & 4th Bars 4x4-3/8
- 8000 # Hubs on Hyd. Gauge Wheels
- Level Plow from Cab
- Shank Clamps Tie to Two Bars
- Shanks are 1-1/4" Thick w/32" Clearance
- 18 Ply Tires Rated at 6000 Lbs. Available As Upgrade

COULTER CHOPPER



- Standard 15-Shank 14' Coulter Chopper
- 55401 Shanks 1-1/2x2 30" Clearance
- Heavy 5-Bolt Clamp — No U Bolts
- 8000# 8-Hole Hubs on Dual Gauge Wheels
- Spring Loaded Gang Coulter w/20" Blades on 12" centers on Front
- 6 Blade Spring Loaded Heavy Duty Stalk Cutter on Rear Bar
- 4-Bar Plow Frame w/4x7-3/8 1st & 2nd Bars and 4x4-3/8 3rd & 4th Bars with Double Head Bars
- Level Plow from Cab
- Available with 5 Blade Stalk Cutters in Front

HOEME 3-POINT PLOW



Standard 21' Rig

- 1 44321 21' Plow Frame
 - 21 H-26 1-1/4x2 Hoeme Shanks 26" Clearance
 - 21 HSH-4 Shank Holders
 - 2 G-446D Dual Gauge Wheels
- Wide Spaced Frame Available

TURN ROW PLOW



8' Plow with Hydraulics



6' Plow with Turnbuckles

- Available with Hydraulics for Simple Adjustment
- Available in 6', 8', and 10' Sizes
- Double Basket with Peg Rake gives Superior Performance
- Shanks Spaced on 6" centers
- Available in Category 1, 2, and 3
- Spring Shanks with Spring Loaded Baskets
- See Roll-A-Cone or your Roll-A-Cone Dealer for more Information

6' Turn Row Plow	Weights 1300 Pounds
8' Turn Row Plow	Weights 1500 Pounds
10' Turn Row Plow	Weights 1700 Pounds


FIELD CULTIVATOR



Standard 21' Rig

- 1 44321 21' Plow Frame
- 43 S-Shanks
- 43 SS-14 Shank Holders
- 2 G-446D Gauge Wheels

STUBBLE MULCHER 3-POINT PLOW

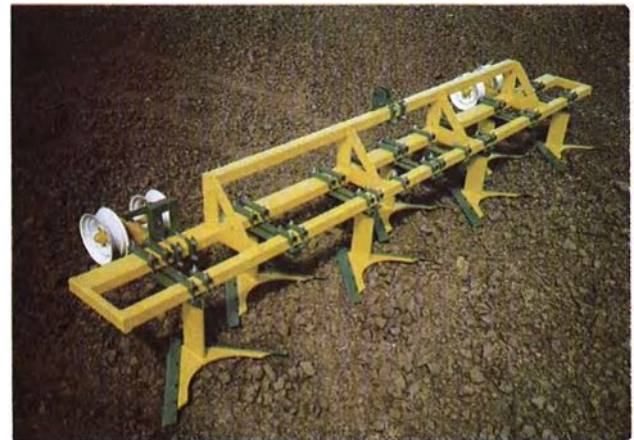

Standard 7-Shank Rig

- 1 47221 21' Plow Frame
- 7 SM-4 Stubble Mulchers w/42" Blades
- 7 pr BSH-8XL Shank Holders
- 2 G-476D Dual Gauge Wheels

BADGER 3-POINT PLOW



Standard 11-Shank

- 1 47318 18' Plow Frame
- 11 Badgers
- 10 pr BSH-8XL Shank Holders Made out of 4x4x1/2" Angle Iron
- 2 G-476DXL 678 Dual Gauge Wheels

SUBSOIL SHANK 3-POINT PLOW



Standard 7-Shank

- 1 47221 EB 21' Plow Frame
- 7 Subsoil Shanks
- 7 pr BSH-8XL Heavy Shank Holders Made out of 4x4x1/2" Angle Iron
- 2 G-476XL 678 Gauge Wheels

SPIDER DIKER & INNER ROW RIPPER



- Simple Depth Adjustment
- Heavy Duty
- Replaceable Hardfaced Blades
- Simple Design for Easy Bearing Replacement
- Each Wheel is Individually Mounted Which Eliminates Cross-Shafts Making Diking In Taller Crops Possible
- Individual Mounting Makes Changing to Skip-Row Diking Simple
- Easily Adapts to All Standard Bar Sizes
- All Parts May Be Purchased Separately or as a Complete Unit

BEDDER BUSTER



- Heavy Duty Plow Frame
- 29" Clearance
- Clamps Tie to Both Bars for Superior Strength
- Clamps Available for Most Standard Bar Sizes
- Shank is Flame Cut Out of 1-1/4 Plate
- Uses Nichols N-346 Furrower with 15" Bottom and 17" Wing
- Uses Tipper for Furrower Support
- Rod Weeder Attachment Available

SHOWN: 8 ROW BEDDER BUSTER

DISC BEDDER



Standard 8-Row

- 1 47228 28' Plow Frame
- 8 Rows Heavy Duty Double Disc Bedders (18" & 20" or 20" & 22" Disc are available)
- 2 G-476XL OS 678 Gauge Wheels

DISC BEDDER

(SINGLE BAR)



Standard 8-Row

- 1 47129 29' Plow Frame W/ 7x4x3/8" Headbar
- 8 Rows Single Bar Heavy Duty Double Disc Bedders (18" & 20" Disc are Standard)
- 2 G-476XL OS 678 Gauge Wheels

DISC BEDDER

(BED MASTER)



Standard 12-Row

- 1 4x7-3/8 Front Bar, 4sq. 3/8 Back Bar, 7x4-3/8 Head Bar. Truss Rods.
- 12 Rows Bed Master Disc Bedder, Scallop Blades shown
- 2 G-476XLOS 678 Gauge Wheels
Same Bearings on Gauge Wheels, Stabilizer, and Disc Bedder Units if Q-678 Hub is used
- 12 Dirt Shields

BADGER BEDDER




Standard 6-Row

(Badgers Adjust 4 to 14" Deeper Than Disc)

- 1 47321 21' Plow Frame
- 6 Adjustable Height Hook Badgers — 1-1/4" Thick
- 6 pr BSH-8XL Heavy Shank Holders
- 2 G-476DXL 678 Dual Gauge Wheels
- "Available with 6 rows of heavy duty double disc bedder or with 6 rows of bed master disc bedders with 24" disc. Available with Hook Badgers or XL badger claw.

STRAIGHT SHANK CULTIVATOR

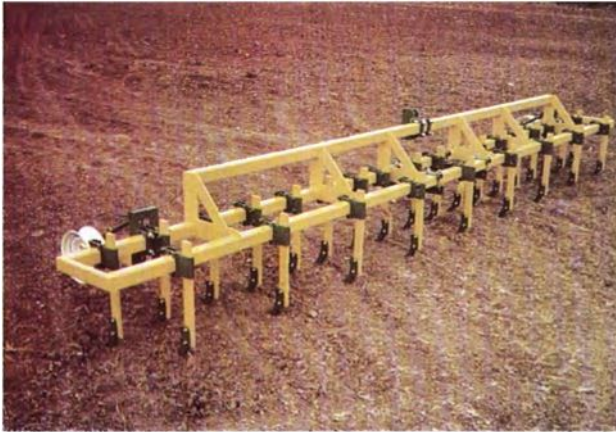

Standard 8-Row Rig

- 1 44228 28' Plow Frame
- 14 SK-2 w/FP-2 3/4x2-1/2 Shanks
- 2 SK-2 Offset with FP-2
- 16 SH-4x4-2 Shank Holders
- 9 SK-3w/FP-3 1x3 Shanks
- 9 R-443 Shank Holder/Replaceable Bolts
- 2 G-446XL OS 678 Gauge Wheels

FERTILIZER RIG



- | | | | | |
|----|----------|---------------------------------|---|-----------------------|
| 1 | 44221 | 21' Plow Frame | 1 | Connector Kit |
| 13 | AHSK-3 | 1x3 Fert. Shank | 1 | Metermatic w/Manifold |
| 13 | R-443 | Shank Holders | 1 | Metermatic Bracket |
| 14 | AH-172 | Knives | 1 | Breakaway Bracket |
| 2 | G-446XLD | 678 Dual Gw | 1 | Breakaway Coupler |
| 1 | | Heavy Nurse Tank Hitch, Sliding | | |
| 13 | | 12' Hose w/Barbs | | |

ROLL-A-PICKER

(Bearing # 203KRR2)



Wheels are on 3-1/2" Centers
 20" Wheels with 16 Teeth per Wheel
 Mounted on Heavy Duty 7x7x1/4" Bar
 Available up to 60"
 Rigid or Folding Frames Available
 Each Wheel is Individually Mounted
 And Spring Loaded
 G-776 Standard w/9.5LTires


TRACK FILLER



- 1 44308 8' Plow Frame
- 3 Rows Single Disc Bedder W/24" Disc
- 1 GW-50 Guide Wheel with Hydraulics
- Bolt on Shanks and Spindles
- Track packer available as attachment
 (Shown on page 9)
 Adds 570 lbs.

1690 lbs.

TRACK PACKER

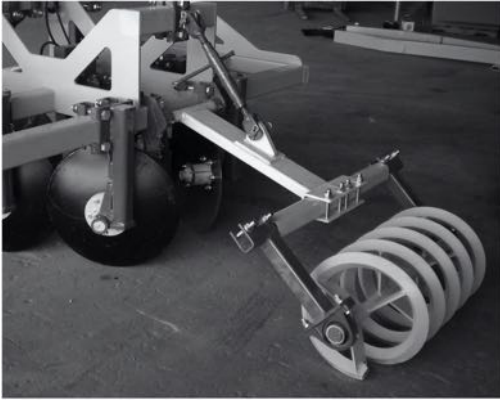

Spring Loaded w/Rubber Torsion Axle
2-1/2' wide coil
Adjustable Depth

Track Packer


570 lbs.

ROD WEEDER KNIFE SLED




Available from 4 Row to 16 Row in any Width Rows
Heavy Duty Double Bar Clamp
Inline Hydraulic Drive

BED ROLLER

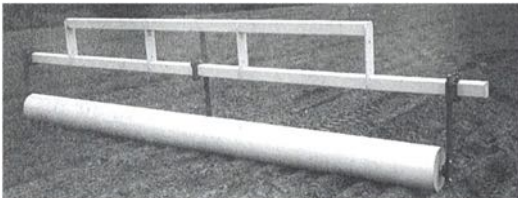

Heavy 12-3/4" OD Pipe
.250 Wall Thickness
(Does not include frame or Shank Holders)
4-R w/154" Roller 493 lbs.
Pipe weight — 31 lbs. per foot

HYDRAULIC ROD WEEDER

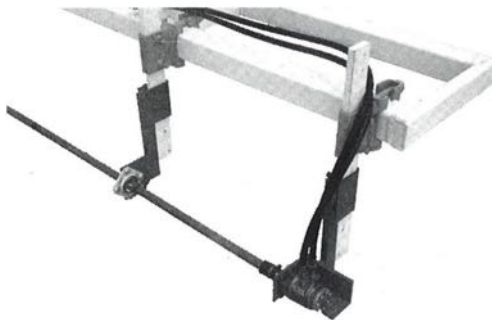

Consists of:
Hydraulic Motor
Motor Mounting Bracket
1" Square to 1" Round Coupler
Extra Motor Seal
Hoses
1" Square Rod 3.4# per foot
Bearings & Flangettes
Bearing Brackets
Rod Retainers


6-R 30" 248 lbs.
6-R 40" 255 lbs.
8-R 30" 311 lbs.
8-R 40" 335 lbs.

SHAPER RINGS

FOR BED ROLLERS ABOVE

For Standard
12-3/4" O.D. Pipe

Weight 54 lbs. per pair



4 X 4 PLOW FRAMES

Priced With Hitch — Please Specify Category 2 or Category 3

SINGLE BARS


Note: We are happy to build most special sized frames. Please call for a price.
Cat. 2 Add 106 lbs. Cat. 3 Add 124 lbs.
Vertical Hitch Available



44114	8'8" Head Bar	14'4" Long	320 lbs.
44118	11'2" Head Bar	18'4" Long	399 lbs.
44121	14'4" Head Bar	21'4" Long	475 lbs.
44128	21'4" Head Bar	28'4" Long	669 lbs.

DOUBLE BARS

Cat. 2 Add 140 lbs. Cat. 3 Add 200 lbs.

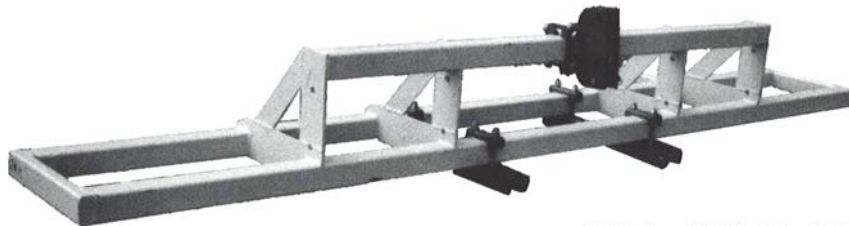

Standard Spacing

- 16" Between Bars


Wide Spaced

- 20" Between Bars

44214	8'8" Head Bar	14'4" Long	612 lbs.
44218	11'2" Head Bar	18'4" Long	740 lbs.
44221	14'4" Head Bar	21'4" Long	852 lbs.
44228	21'4" Head Bar	28'4" Long	1176 lbs.

TRIPLE BARS

Cat. 2 Add 140 lbs. Cat. 3 Add 200 lbs.

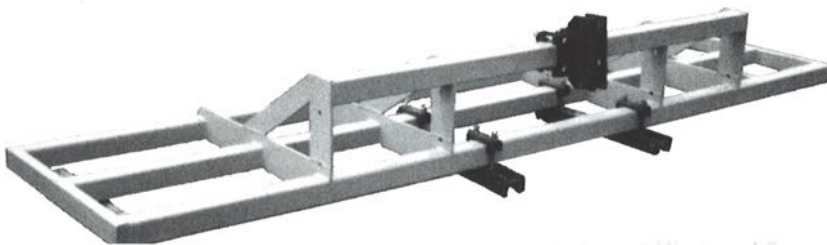

Standard Spacing

- 16" Between Bars

Wide Spaced

- 20" Between Bars

44314	8'8" Head Bar	14'4" Long	878 lbs.
44318	11'2" Head Bar	18'4" Long	1055 lbs.
44321	14'4" Head Bar	21'4" Long	1203 lbs.
44328	21'4" Head Bar	28'4" Long	1649 lbs.

HEAVY DUTY PLOW FRAMES

Priced with Hitch — Please Specify Category 2 or Category 3 — With 4x7x.375 Wall Front Bar

SINGLE BARS

Cat. 2 Add 118 lbs. Cat. 3 Add 144 lbs.
Also available with vertical hitch



47114	8'8"	Head Bar	14'4" Long	502 lbs.
47118	11'2"	Head Bar	18'4" Long	632 lbs.
47121	14'4"	Head Bar	21'4" Long	742 lbs.
47128	21'4"	Head Bar	28'4" Long	1029 lbs.

DOUBLE BARS

Cat. 2 Add 148 lbs. Cat. 3 Add 208 lbs.



Standard Spacing

- 13" Between Bars


Wide Spaced

- 17" Between Bars

47214	8'8"	Head Bar	14'4" Long	794 lbs.
47218	11'2"	Head Bar	18'4" Long	973 lbs.
47221	14'4"	Head Bar	21'4" Long	1123 lbs.
47228	21'4"	Head Bar	28'4" Long	1536 lbs.

TRIPLE BARS

Cat. 2 Add 148 lbs. Cat. 3 Add 208 lbs.

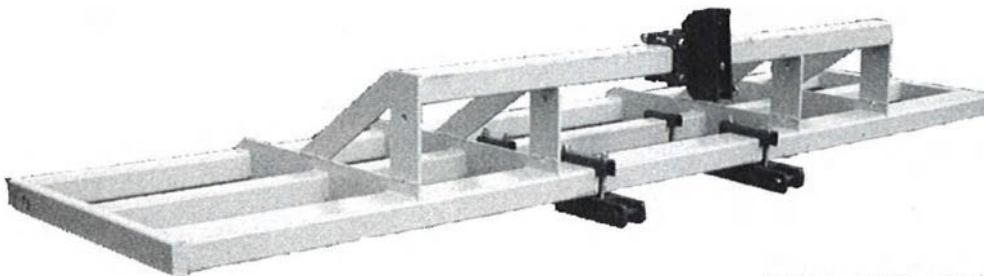

Standard Spacing

- 13" Between Front Bars
- 16" Between Back Bars

Wide Spaced

- 17" Between Front Bars
- 20" Between Back Bars


47314	8'8"	Head Bar	14'4" Long	1060 lbs.
47318	11'2"	Head Bar	18'4" Long	1288 lbs.
47321	14'4"	Head Bar	21'4" Long	1474 lbs.
47328	21'4"	Head Bar	28'4" Long	2009 lbs.

Prices with Hitch - Please Specify Category 2 or Category 3

STANDARD DOUBLE BARS

All 4x4 Bars
20" Between Bars
Cat. 2 Add 148 lbs. Cat. 3 Add 212 lbs.


44214T	8'8"	Head Bar	14'4"	Long	714 lbs.
44218T	11'2"	Head Bar	18'4"	Long	842 lbs.
44221T	14'4"	Head Bar	21'4"	Long	954 lbs.
44228T	21'4"	Head Bar	28'4"	Long	1290 lbs.

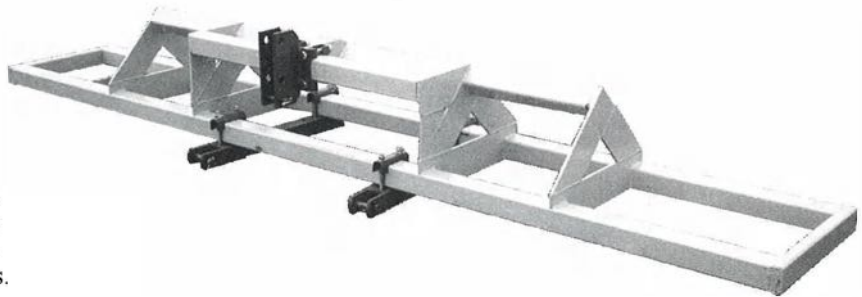

STANDARD TRIPLE BARS

All 4x4 Bars
20" Between Bars
Cat. 2 Add 148 lbs. Cat. 3 Add 212 lbs.


44314T	8'8"	Head Bar	14'4"	Long	1032 lbs.
44318T	11'2"	Head Bar	18'4"	Long	1198 lbs.
44321T	14'4"	Head Bar	21'4"	Long	1347 lbs.
44328T	21'4"	Head Bar	28'4"	Long	1813 lbs.

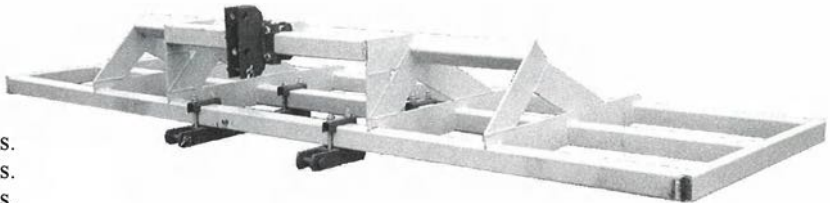

HEAVY DUTY DOUBLE BARS

4x7x.375 Wall Front Bar
17" Between Bars
Cat. 2 Add 152 lbs. Cat. 3 Add 216 lbs.


47214T	8'8"	Head Bar	14'4"	Long	896 lbs.
47218T	11'2"	Head Bar	18'4"	Long	1075 lbs.
47221T	14'4"	Head Bar	21'4"	Long	1225 lbs.
47228T	21'4"	Head Bar	28'4"	Long	1650 lbs.

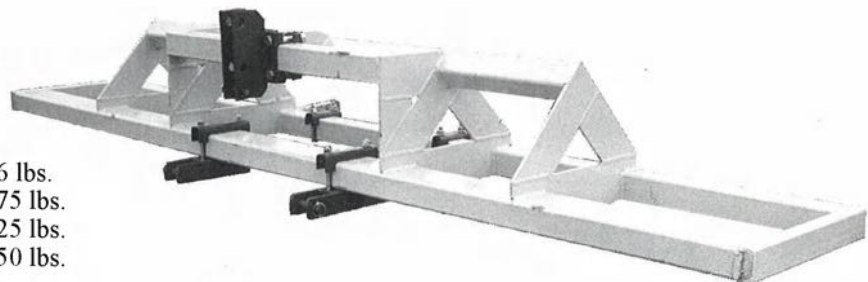

HEAVY DUTY TRIPLE BARS

4x7x.375 Wall Front Bar
17" Between Front & Second Bar
20" Between Second & Third Bars
Cat. 2 Add 152 lbs. Cat. 3 Add 216 lbs.


47314T	8'8"	Head Bar	14'4"	Long	1204 lbs.
47318T	11'2"	Head Bar	18'4"	Long	1431 lbs.
47321T	14'4"	Head Bar	21'4"	Long	1594 lbs.
47328T	21'4"	Head Bar	28'4"	Long	2173 lbs.

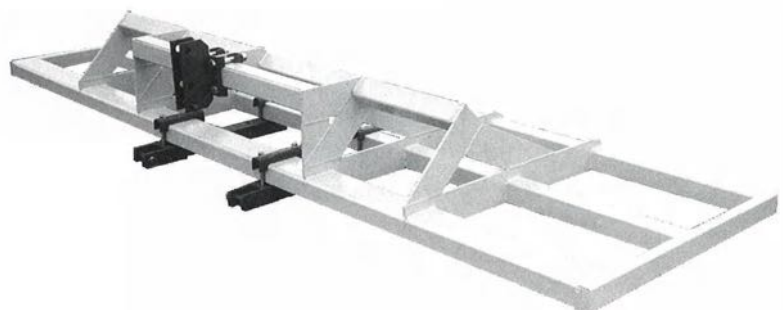

FOLDING PLOW FRAMES

Prices with Hitch - Please Specify Category 2 or Category 3

NOTE:
Center Sections and
Wings can be used in
any combination

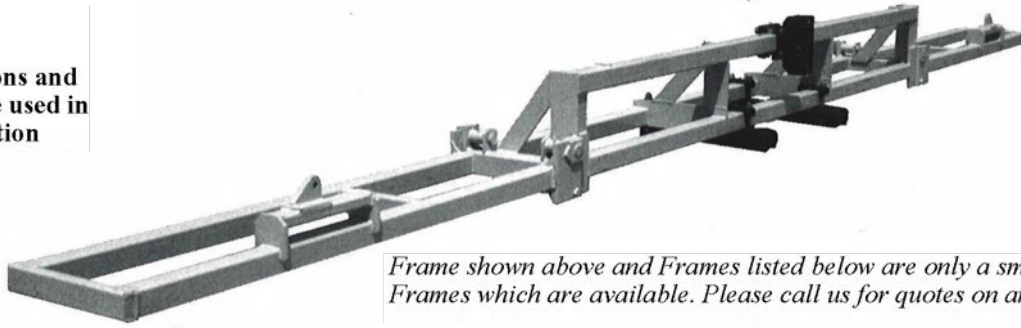

Frame shown above and Frames listed below are only a small fraction of the Frames which are available. Please call us for quotes on any Frame not listed

Center Sections Head Bar Full Width

Pair of Wings

4x4 Double Bars Standard Space

16" Between Bars

Wide Space

20" Between Bars

44214	with Hinges	14'4" Long	Weight	900 lbs.
44218	with Hinges	18'4" Long	Weight	1046 lbs.
44221	with Hinges	21'4" Long	Weight	1155 lbs.
44228	with Hinges	28'4" Long	Weight	1473 lbs.

44242"	Each Wing 42" Long	Weight 275 lbs.
44260"	Each Wing 60" Long	Weight 370 lbs.
44284"	Each Wing 84" Long	Weight 446 lbs.
44296"	Each Wing 96" Long	Weight 540 lbs.

4x4 Triple Bars Standard Space

16" Between Bars

Wide Space

20" Between Bars

44314	with Hinges	14'4" Long	Weight	1170 lbs.
44318	with Hinges	18'4" Long	Weight	1365 lbs.
44321	with Hinges	21'4" Long	Weight	1511 lbs.
44328	with Hinges	28'4" Long	Weight	1949 lbs.

44342"	Each Wing 42" Long	Weight 424 lbs.
44360"	Each Wing 60" Long	Weight 556 lbs.
44384"	Each Wing 84" Long	Weight 680 lbs.
44396"	Each Wing 96" Long	Weight 800 lbs.

Heavy Duty Double Bars

(4x7x.375 Wall Front Bar)

Standard Space

13" Between Bars

Wide Space

17" Between Bars

47214	with Hinges	14'4" Long	Weight	1078 lbs.
47218	with Hinges	18'4" Long	Weight	1275 lbs.
47221	with Hinges	21'4" Long	Weight	1422# lbs.
47228	with Hinges	28'4" Long	Weight	1829 lbs.

47242"	Each Wing 42" Long	Weight 360 lbs.
47260"	Each Wing 60" Long	Weight 492 lbs.
47284"	Each Wing 84" Long	Weight 617 lbs.
47296"	Each Wing 96" Long	Weight 735 lbs.

Heavy Duty Triple Bars (4x7x.375 Wall Front Bar)

Standard Space

13" Between Front Bars

16" Between Back Bars

Wide Space


17" Between Front Bars

20" Between Back Bars

47314	with Hinges	14'4" Long	Weight	1348 lbs.
47318	with Hinges	18'4" Long	Weight	1594 lbs.
47321	with Hinges	21'4" Long	Weight	1778 lbs.
47328	with Hinges	28'4" Long	Weight	2305 lbs.

47342"	Each Wing 42" Long	Weight 509 lbs.
47360"	Each Wing 60" Long	Weight 678 lbs.
47384"	Each Wing 84" Long	Weight 851 lbs.
47396"	Each Wing 96" Long	Weight 995 lbs.


TRUSS RODS FOR PLOW FRAMES

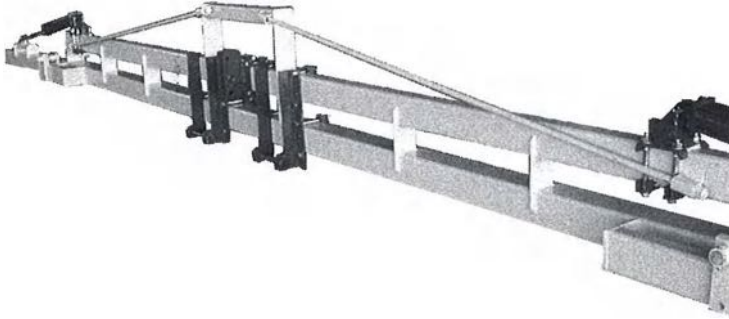

Truss rods can be installed on any frame for added strength. Call for quotes.


PLOW HYDRAULICS

Consists of:
 *4-1/2x36, 4x36" or 3x36" Cylinders
 *Hoses Included
 *Float Brackets
 *All Necessary Bolts and Pins

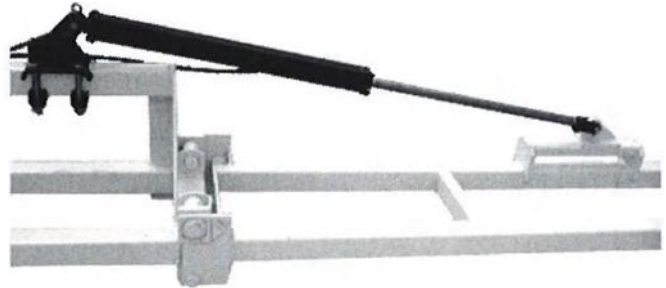

Floating Headbar Ears Allow Wing Flotation

HEAVY HINGES

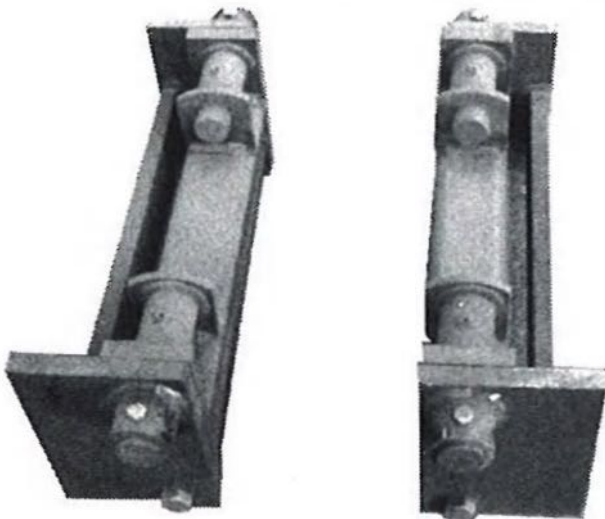

These hinges have a 1-15/16" pin with 1x8" and 1x4" plates on front bar and 3/4x6" and 1x4" plates with 1-15/16" pins on back bars.


HD Hinge

94 lbs. Per Side

HOW TO ORDER HINGES

1. Specify number of bars to be folded (1,2,3,or 4 bars)
2. Specify vertical measurement of bars (hinges available for 4" to 7" bar only)
3. Measure distance from front of front bar to back of back bar

PLOW EXTENSIONS

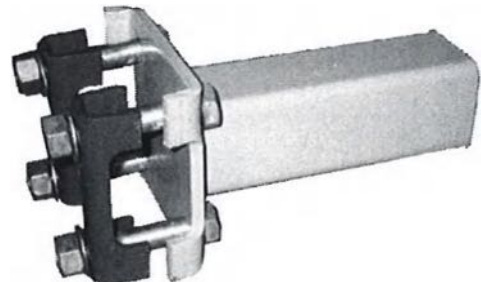

8" Extensions
 12" Extensions
 18" Extensions
 24" Extensions
 36" Extensions

Weight Per Pair 56 lbs.
 Weight Per Pair 64 lbs.
 Weight Per Pair 76 lbs.
 Weight Per Pair 88 lbs.
 Weight Per Pair 108 lbs.

PLOW FRAME HITCHES

HOW TO ORDER HITCHES

Please specify distance between bars


EXAMPLE: H -4 7 2 2

1. 1st number is vertical bar dimension
2. 2nd number is horizontal bar dimension
3. 3rd number tells 1 or 2 bar hitch
4. 4th number tells category 2, 3 or C for combination, V for Vertical, W for Wide, SP for Spit, and D for Drop

WIDE HITCH

Shown H-4423W

Please specify distance between bars

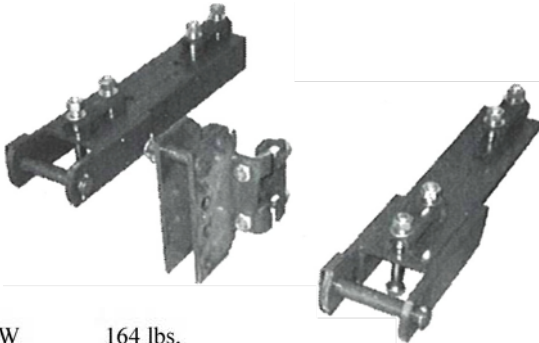

H-4413W	164 lbs.	
H-4713W	168 lbs.	
H-4423W	16" Between Bars—24" Overall Width	208 lbs.
H-4423W	20" Between Bars—28" Overall Width	216 lbs.
H-4723W	13" Between Bars—24" Overall Width	212 lbs.
H-4723W	17" Between Bars—28" Overall Width	220 lbs.
This hitch will work on Category 3 Narrow and Category 3 Wide		

VERTICAL HITCH

Shown H-4422V


These hitches comes in a variety of sizes.



H-4422V	158 lbs.
H-4423V	160 lbs.
Please call us with your special needs.	

SINGLE BAR HITCH


Shown H-4412

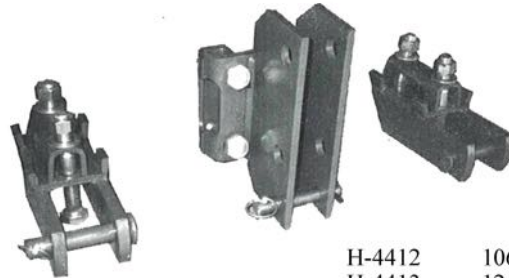

H-4412	106 lbs.
H-4413	124 lbs.
H-4712	118 lbs.
H-4713	144 lbs.

DOUBLE BAR HITCH


Shown H-4422

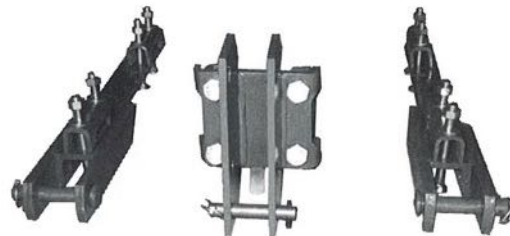

H-4422	16" Between Bars—24" Overall Width	140 lbs.
H-4423	16" Between Bars—24" Overall Width	200 lbs.
H-4722	13" Between Bars—24" Overall Width	148 lbs.
H-4723	13" Between Bars—24" Overall Width	208 lbs.
H-4422	20" Between Bars—28" Overall Width	148 lbs.
H-4423	20" Between Bars—28" Overall Width	212 lbs.
H-4722	17" Between Bars—28" Overall Width	152 lbs.
H-4723	17" Between Bars—28" Overall Width	216 lbs.

DROP HITCH

Shown H-4423D

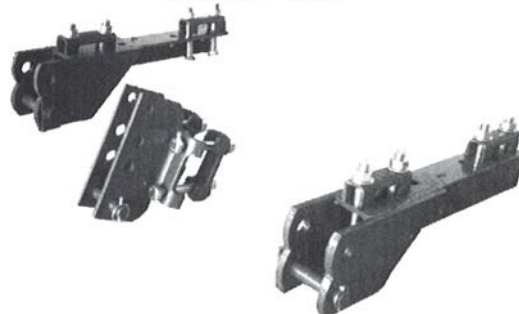


H-4423D	212 lbs.
H-4723D	216 lbs.

COMBINATION HITCH

Shown H-442C

H-442C	16" Between Bars—24" Overall Width	237 lbs.
H-472C	13" Between Bars—24" Overall Width	253 lbs.
H-442C	20" Between Bars—28" Overall Width	246 lbs.
H-472C	17" Between Bars—28" Overall Width	262 lbs.

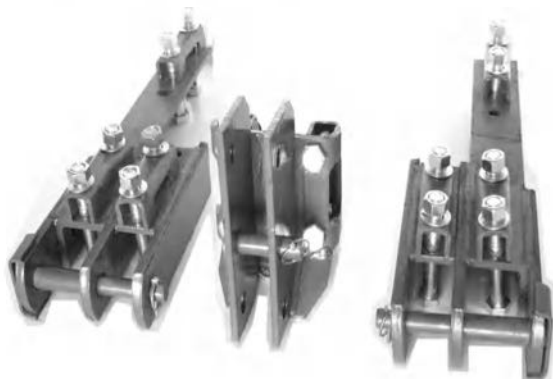

SPLIT HITCH

Split Hitches are Available in Single Bar, Double Bar, And Vertical Hitches

H-4423 Split	16" Between Bars—24" Overall Width	278 lbs.
H-4423 Split	20" Between Bars—28" Overall Width	295 lbs.



A-FRAME HITCHES

HOW TO ORDER A-FRAME HITCHES

EXAMPLE: A-6 8 3

1. 1st number is vertical bar dimension
2. 2nd number is horizontal bar dimension
3. 3rd number tells category 1, 2, or 3

Call Roll-A-Cone for Any Special Hitches

QUICK HITCH


For Square or Rectangular Bars



A-442	109 lbs.
A-443	127 lbs.
A-472	134 lbs.
A-473	160 lbs.
A-773	165 lbs.

QUICK HITCH

For 2-1/4 Diamond Bar

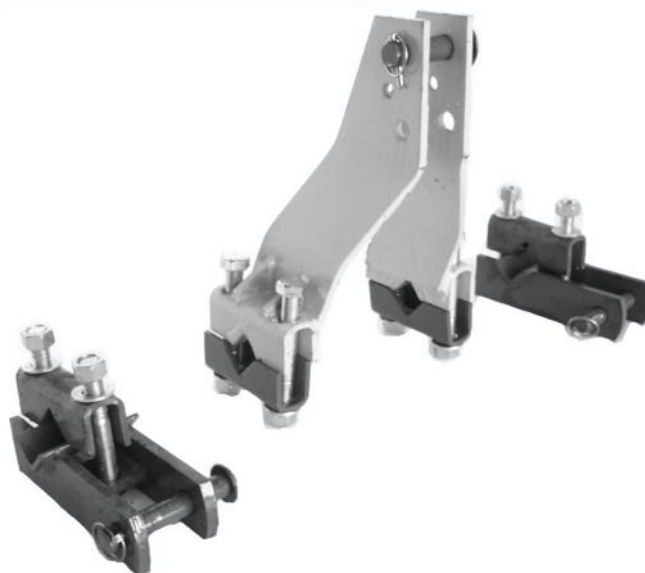


A-103 QH-2	114 lbs.
A-103 QH-3	130 lbs.

TOOL BAR SPACERS

For 4x4 or 4x7 to 2-1/4 Diamond Bars

	Weight	Distance Between the Bars
S-4x4-6	22 lbs.	6"
S-4x4-8	24 lbs.	8"
S-4x4-12	29 lbs.	12"

	Weight	Distance Between the Bars
S-4x7-6	23 lbs.	6"
S-4x7-8	25 lbs.	8"
S-4x7-12	30 lbs.	12"

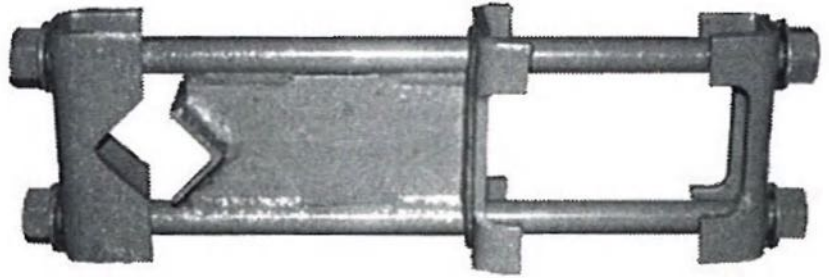


For 4" Square to 4" Square Bars

	Weight	Distance Between The Bars
S-4x4-4x4-6	25 lbs.	6"
S-4x4-4x4-12	30 lbs.	12"
S-4x4-4x4-16	35 lbs.	16"
S-4x4-4x4-20	38 lbs.	20"



For 2-1/4 Diamond Bars

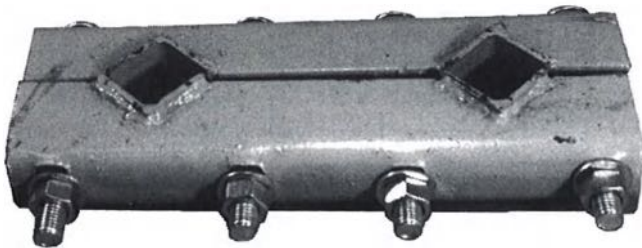

		Weight	Centers
S-222	2 Bar	37 lbs.	22-3/16"
S-206	2Bar	19 lbs.	6"

	Weight	Centers
S-2-1/4x2-1/4-8	20 lbs.	8"
S-2-1/4x2-1/4-12	27 lbs.	12"
S-2-1/4x2-1/4-20	34 lbs.	20"

This is a discontinued item so quantities are limited. Please call for availability. All 2 bar spacers not available in this style are available in tie rod type spacers shown to the right.


Many other sizes are available. Please call for sizes not listed.

**We have many more spacers not listed here.
Please call Roll-A-Cone or see your dealer for
any special tool bar spacers**

STALK CUTTER UNITS

GANG STALK CUTTERS


- 40" Rows have 70" blades
- 30" Rows have 50" blades
- 6-blade stalk cutter blades on front bar
- 8-blade stalk cutter blades on back bar
- 1-7/16" Chopper shaft
- 17" Diameter
- Bearing: NANFL207-23 R3

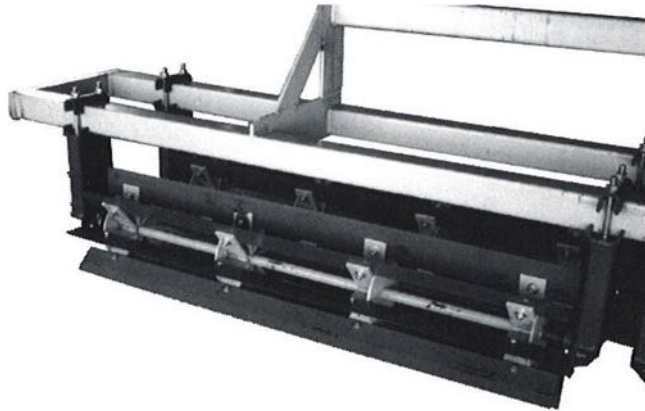

	6Blade	8 Blade
4'	225 lbs.	271 lbs.
5'	247 lbs.	295 lbs.
6'	291 lbs.	355 lbs.
7'	313 lbs.	381 lbs.
8'	359 lbs.	441 lbs.

SPRING LOADED UNITS


- Standard 7' section
- Telescoping mounting arms
- Mounting arms are individually spring loaded
- 1-7/16" chopper shaft
- Replaceable chopper blades
- Mounts to most standard bar
- Heavy duty flange mount ball bearing NANFL207-23 R3
- 17" diameter

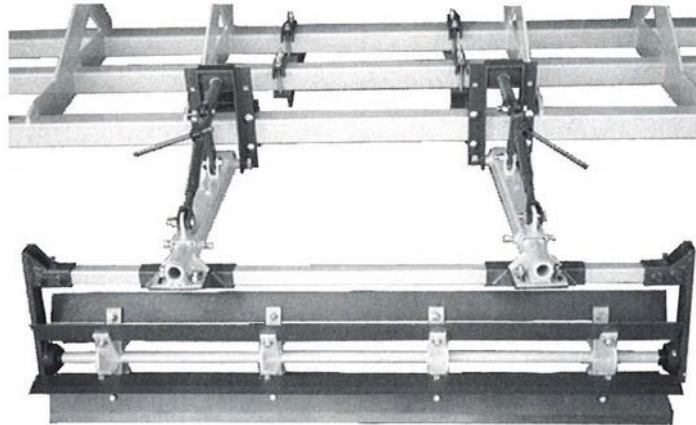

	6 Blade	8 Blade
4'	434 lbs.	480 lbs.
5'	456 lbs.	504 lbs.
6'	500 lbs.	564 lbs.
7'	530 lbs.	598 lbs.
8'	576 lbs.	658 lbs.

RIGID MOUNT UNITS

- Standard 7' section
- Mounted rigid on 1x3" shanks
- Replaceable chopper blades
- Heavy duty flange mount ball bearing NANFL207-23 R3
- 17" Diameter
- Order clamps separately

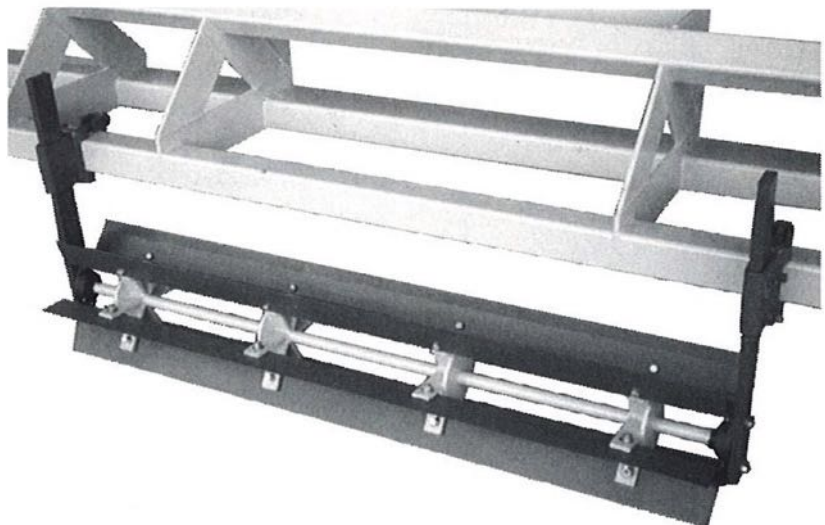

	6 Blade	8 Blade
4'	225 lbs.	271 lbs.
5'	247 lbs.	295 lbs.
6'	291 lbs.	355 lbs.
7'	313 lbs.	381 lbs.
8'	359 lbs.	441 lbs.

ROW STALK CUTTERS

1-Row 6 Blade Stalk Cutter Shown

17" Diameter

Available with 12" or

18" Blade Length

1-7/16" Shaft

NANFL207-23 R3 Bearing

Available with 6 or 8 Blades

Mounted on 1x3 Shank

Order Shank Holder on Page 25


6 Blade 12" 130 lbs.

8 Blade 12" 147 lbs.

6 Blade 18" 150 lbs.

8 Blade 18" 170 lbs.

SHOWN: SC 1-R 6BLD 18"

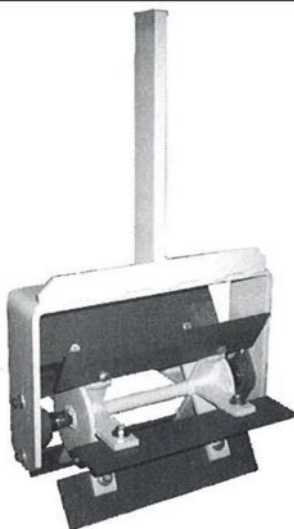

OFFSET

1-Row 6 Blade Offset Shown

17" Diameter

Available with 12" or

18" Blade Length

1-7/16" Shaft

NANFL207-23 R3 Bearing

Available with 6 or 8 Blades

Mounted on 1x3 Shank

Shank is offset 3-1/2"

Order Shank Holder on Page 25


6 Blade 12" 130 lbs.

8 Blade 12" 147 lbs.

6 Blade 18" 150 lbs.

8 Blade 18" 170 lbs.

SHOWN: SC 1-R 6BLD OS 18"

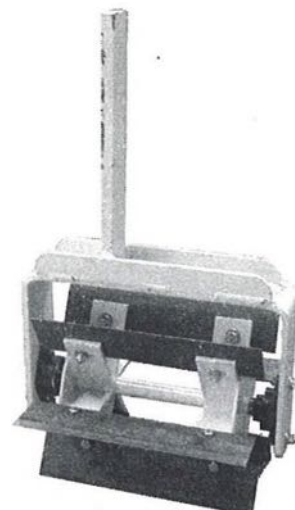

DOUBLE ROW STALK CUTTERS

Includes 1-6 blade and 1-8 blade unit

17" Diameter

Only Available with 18" Blade Length

1-7/16" Shaft

WPS-107-GRC Bearing

Fits Most Standard Double Bars

22" Clearance

SHOWN: 1-R 6&8 BLD SC 340 lbs.



SPRING LOADED ROW STALK CUTTER

Mounted on 1x3 w/Rubber Torsion Axle

1-Row 8 Blade Spring Loaded Stalk

Cutter Shown

17" Diameter

Available with 12" or 18"

Blade Length

1-7/16" Shaft prior to 2017

1-1/2" Shaft 2017 and on

NANFL207-23 R3 Bearing

Available with 6 or 8 Blades

Order Shank Holder on Page 25

Works as Centered or Offset

No Wear Joints

6 Blade 12" 125 lbs.

8 Blade 12" 142 lbs.

6 Blade 18" 146 lbs.

8 Blade 18" 168 lbs.


SHOWN: SC 1-R 8BLD SLT



HYDRAULIC ROW MARKERS

STRAIGHT MARKER

- 3x6x10 Gauge main wings
- 1" Hinge pins
- Fits most standard tool bars
- Single acting cylinder or available with double acting cylinder as single acting

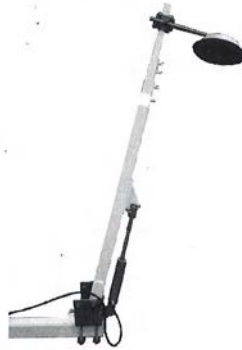

M-10 Min 5' Max 13-1/2' 332 lbs.
 M-20 Min 9-1/2' Max 19-1/2' 396 lbs.
 Measurements are from end of bar to disc

HM SERIES FOLDING MARKER

- 3x8x10 Gauge main wings
- 1-1/4" Hinge pins
- Available with double or single acting cylinder
- Fits most standard tool bars



HM-00	Min 8-1/2'	Max 11'	536 lbs.
HM-0	Min 9-1/2'	Max 13'	554 lbs.
HM-1	Min 11-1/2'	Max 17'	590 lbs.
HM-2	Min 14-1/2'	Max 21'	626 lbs.
HM-3	Min 18-1/2'	Max 25'	661 lbs.

OM SERIES FOLDING MARKER

- This marker folds over for better clearance through gates, fences, etc.
- Safer transporting
- 3x8x10 Gauge main wing
- 1-1/4" Hinge pins
- Use only with double acting cylinder
- Fits most standard tool bars




OM-00	Min 8-1/2'	Max 11'	552 lbs.
OM-0	Min 9-1/2'	Max 13'	570 lbs.
OM-1	Min 11-1/2'	Max 17'	606 lbs.
OM-2	Min 14-1/2'	Max 21'	650 lbs.
OM-3	Min 18-1/2'	Max 25'	685 lbs.
OM-4	Min 20-1/2'	Max 27'	700 lbs.

Measurements are from end of bar to disc

M-7 & M-8 SERIES FOLDING MARKER

- Simple, foolproof operation
- Highly successful marking disc
- Each wing uses one 2x16 cylinder
- Extreme rigidity with light weight
- Adaptable to almost any size toolbar

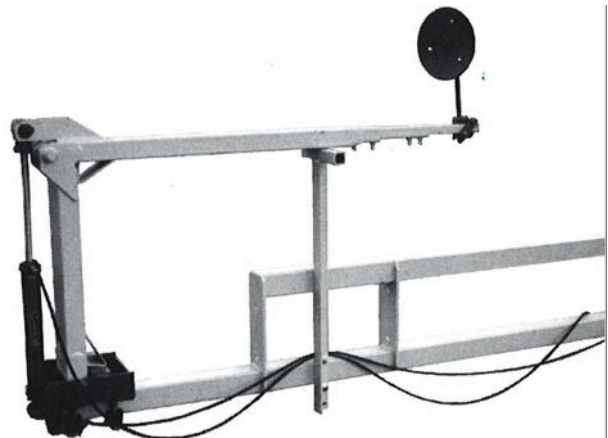


M-7	Min 8'	Max 14'	584 lbs.
M-8	Min 10'8"	Max 16'8"	624 lbs.

TRANSPORTING EQUIPMENT

TRANSPORT WHEELS

Used to transport plow end-ways.

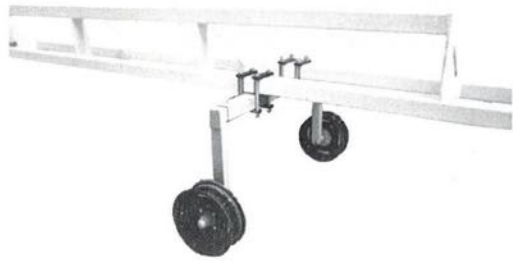

5-Bolt	2-Bar	174 lbs.
5-Bolt	3-Bar	192 lbs.

TRANSPORT TONGUE

For Use with transport wheels



Trans Tongue Sgl Bar Specify Bar Size	84 lbs.
Trans Tongue Fits our plow frame	84 lbs.

2 BALE

BALE HAULERS

3 BALE

1 Bale Hauler Available Not Shown

1-15/16 Cold Rolled Prongs
Prongs mounted on 2x4x.375 wall Tubing
Replaceable 58" Long Prongs
10'4" Frame on 2 Bale
18' Wide Frame on 3 Bale
Bolt on Hitch



1 Bale Hauler	Weighs	465 Pounds
2 Bale Hauler	Weighs	745 Pounds
3 Bale Hauler	Weighs	1370 Pounds



CYLINDERS



We Stock a Wide Variety of
Cylinders From 2x8" (Shown) to
4-1/2x36" Including Many Rephase
Cylinders from 3-1/4x10" to 5x16".

COTTON BALE SPEAR



2-1/2" X 8 Ft Spears on Bottom
2-1/8" X 6 Ft. Spears on Top
4" Sq. x 3/8" Wall Frame
Hitch, Kickstand, and Spear End Caps Included

CBM-1C 1100 LBS.

ACCESSORIES


TOOL BARS AND TUBING

	Weight Per Foot
2-1/4x2-1/4 Solid	17.21#
2-1/2x2- 1/2x.250	7.1#
4x4x.250	12.51#
4x7x.250	18.8#
4x4x.375	17.27#
4x7x.375	24.9#
6x8x.375	33.3#
7x7x.375	33.3#



STRAPS

4" 3/4" Hole 5/8x2 Material	Wt 2#
4" 1" Hole 5/8x3 Material	Wt 2.5#
5" 1" Hole 5/8x2-1/2 Material	Wt 3#
7" 3/4" Hole 5/8x2 Material	Wt 3#
7" 1" Hole 5/8x3 Material	Wt 5#
8" 3/4" Hole 5/8x2 Material	Wt 3.5#
8" 1" Hole 3/4x3 Material	Wt 7#

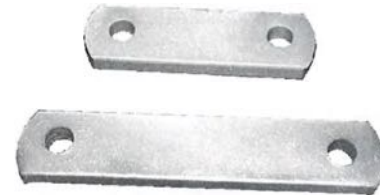

U-BOLTS



SHOWN: 4" U-Bolt 6-1/2" Leg 3/4 Material

We Stock a Variety of U-Bolts and Can Make Many More to Your Specs.

PULL PINS

Please call us for any special pull pins



Size	Category	Position	Weight
3/4x5"	1	Top	1 lbs.
7/8x4- 1/2"	1	Bottom	1.5 lbs.
1x5"	2	Top	2 lbs.
1-1/8x5-1/2"	2	Bottom	2.5 lbs.
1-1/4x4- 1/2"	3	Top	2.5 lbs.
1-7/16x6-1/2"	3	Bottom	5 lbs.
1-7/16x 1-1/8x9-3/4"	2&3	Combination Bottom	5.5 lbs.

CAPS



Type of Bar	Size of Bar	Size of Holes	Wall Thickness (In.)	Weight
Diamond	up to 2-1/2"	3/4"	5/16"	3#
Diamond	up to 2-1/2"	3/4"	3/8"	3.5#
Diamond	up to 2-1/2"	1"	3/8"	4#
Diamond	up to 4"	1"	3/8"	5#
Flat	2"	3/4"	3/8"	2#
Flat	3"	3/4"	3/8"	2.5#
Flat	4"	3/4"	3/8"	3#
Flat	4" Tall	1"	3/8"	3.5#
Flat	4" Short	1"	3/8"	2.5#
Flat	4"	1-1/4"	1/2"	4.5#
Flat	5"	3/4"	3/8"	4#
Flat	5"	1"	3/8"	4#
Flat	6"	3/4"	3/8"	4.25#
Flat	6"	1"	3/8"	4#
Flat	7"	3/4"	3/8"	4.5#
Flat	7"	1"	3/8"	4.5#
Flat	8"	3/4"	3/8"	5#
Flat	8"	1"	3/8"	5#

GAUGE WHEELS

How to Order Gauge Wheels

Example: G-4 7 6 D XL

1. 1st number is vertical bar size
2. 2nd number is horizontal bar size
3. 3rd number is the hub size (4, 5, 6 or 8 hole)
4. Add D for Dual
5. Add XL for Heavy Gauge Wheel
6. Add SD for Super Duty 8 Hole
7. Add OS for Offset
8. Please see page 42 for Hub Description and Ratings

G-3 LIGHT DUTY



- Consists of:
- 4.00x9 or 6.00x9 tire & tube
 - 5-Hole, 4-1/2" bolt circle
 - 3.28" Pilot hub rated at 1750 lbs.
 - Spindle mounted on 1"x3"x30" shank

G-3 Weight 58 lbs.
G-3D (Dual) Weight 73 lbs.

G-6 LIGHT DUTY



- Available in 6 hole w/20.5 x 8 -10 Tire
- 6-Hole, Q-888, or Q-783 Hub
- Slide in Spindle mounted on 1"x3"x30" shank

G-6 Weight 64 lbs.

HEAVY DUTY OFFSET

With Replaceable Spindle

Add XL OS When Ordering This Gauge Wheel



SHOWN: G-446XLOS

- Same as G-446XL (on page 24) except
- 4x4x1/4" tubing offset to one side
 - Replaceable Spindle
 - Vertical Adjustment
 - 6-Hole Gauge Wheel Available with Q-719, Q-888, Q-783, Q-678, Hub
 - See page 42 for Hub Ratings & Descriptions
 - 6" or 8" wheel available

LIGHT DUTY




SHOWN: G-444

- Consists of: Single 89 lbs.
- 15x4-1/2" x 4-Hole Rim
 - 4-Hole Hubs Rated at 1500 lbs. Capacity
 - 5" Bolt Circle & 3.62" Pilot
 - Axle made of 2x4x1/4" Wall Tubing
 - Mounting Bracket is made of 3X3X1/2" Angle Iron
 - Replaceable Spindle
 - Vertical Adjustment

STANDARD

With Replaceable Spindle

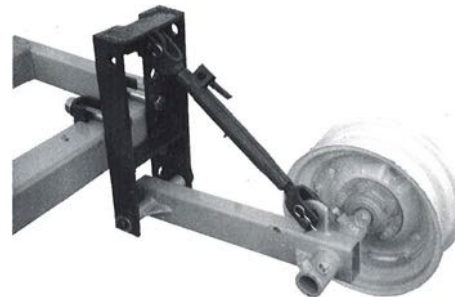

SHOWN: G-446


- Consists of:
- This Gauge Wheel will work with Q-719, Q-888, Q-783 Hubs
 - Please see Page 42 for Hub Ratings and Descriptions
 - Axle made of 2x4x1/4" wall tubing
 - Mounting bracket made of 3x3x-1/2" angle iron
 - 15x5"x5-hole or 15x6"x6-hole wheel Standard
 - 6-hole 8" wide wheel also available
 - Available with 2x4 axle extended 6"
 - Replaceable Spindle
 - Vertical Adjustment
 - Can be ordered as a Single or Dual Gauge Wheel
 - Heavy 5-bolt Single 132 lbs. Heavy 5-bolt Dual 169 lbs.
 - Heavy 6-bolt Single 134 lbs. Heavy 6-bolt Dual 173 lbs.
- * Specify 15" or 16" Wheel

GAUGE WHEELS

HEAVY DUTY

With Replaceable Spindle

Add XL When Ordering This Gauge Wheel

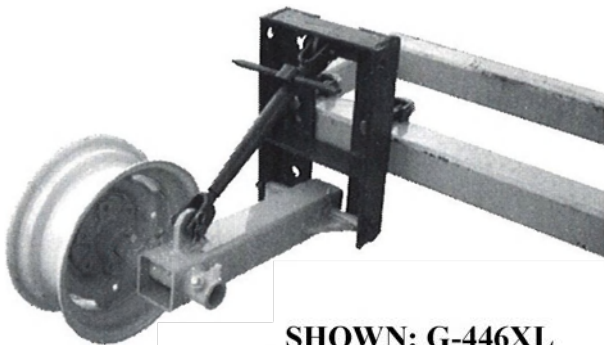

SHOWN: G-446XL

Consists of:

- 5 or 6-bolt hubs
- Axle made of 4x4x1/4" wall tubing
- Mounting bracket made of 4x4x1/2" angle iron
- 5 or 6 Hole Wheel (6-Hole Wheels Available in 6" or 8" Wide)
- Available Hubs: Q-791, Q-888, Q-783, Q-678

• Please see Page 42 for Hub Ratings and Descriptions

- 16x6"x 6-hole wheel also available
- Available with 4x4 axle extended 6"

• Replaceable Spindle

• Vertical Adjustment

* Specify on 6-hole wheel: 6" or 8" wide

XL 5-Bolt Single Wt 160#

XL 5-Bolt Dual Wt 196#

XL 6-Bolt Single Wt 170#

XL 6-Bolt Dual Wt 225#

SUPER DUTY

With Replaceable Spindle



SHOWN: G-448SD

- Axle made of 4x7x.375 wall tubing
- Mounting brackets made of 4x4x1/2 Angle
- Available with 15x6 or 16x6 or 16x10 wheel
- Q-778 8-Hole hub rated at 4900 lbs.
- 6" Pilot with 8" bolt circle
- Replaceable Spindle
- Vertical Adjustment

G-448SD 230 lbs.

HEAVY DUTY WIDE

With Replaceable Spindle

Add DXLW When Ordering This Gauge Wheel



Same as G-446DXL except

- Extra wide tire centers
- Specify tire centers when ordering (40" or 30")
- Specify 15" or 16" Wheel
- Specify 6" or 8" Wheel

G-446DXLW 200 lbs.

SHOWN: G-446DXLW

STANDARD DUTY EXTENDED

With Replaceable Spindle

Add EXT. ARM 48" CU When Ordering This Gauge Wheel

(For Use With Hooded Sprayer)



SHOWN: G-446 EXT ARM 48" CU

- Consists of:
- 5 or 6 bolt hubs
- Axle made of 2x4x1/4" wall tubing
- Available with 2x4 straight or curved down as shown
- Mounting bracket made of 3x3x-1/2" angle iron
- 15x5"x5-hole or 15x6"x6-hole wheel Std
- Available Hubs: Q-719, Q-888, Q-783
- See Page 42 for Hub Ratings and Descriptions
- 6-hole 8" wide wheel also available
- Replaceable Spindle
- Vertical Adjustment
- Heavy 5-bolt Single 155 lbs.
- Heavy 6-bolt Single 163 lbs.
- * Specify 15" or 16" Wheel

SHANK HOLDERS

How to Order Shank Holders

Example: SH- 6 8 3

1. 1st number is vertical bar size
2. 2nd number is horizontal bar size
3. 3rd number is shank size
(Refer to chart at right)

Shank Size
1=5/8x2"
2=3/4x2-1/2"
3=1x3"
4=1-1/4x3
5=1x4
6=1-1/2x3
7=1-1/4x4

1x3 Pocket with Set Screws and Plate




1x3 Pocket 9 lbs.
1-1/4x3 Pocket 9 lbs.

1x3 Pocket with Set Screws and End Caps



1x3 Pocket 10 lbs.
1-1/4x3 Pocket 10 lbs.

For Use With John Deere Flex Planter




SH-7x7 EXT. 3-5FP 37 lbs.

For Square or Rectangular Bar WITH REPLACEABLE BOLTS



R-443	1x7 Bolts	28 lbs.
R-444	1-1/8x7-1/2 Bolts	34 lbs.
R-463	1x9 Bolts	29 lbs.
R-473	1x10 Bolts	29 lbs.
R-474	1-1/8x10-1/2 Bolts	36 lbs.
R-5734	1x10 Bolts	28 lbs.
R-6434	1x7 Bolts	32 lbs.
R-6634	1x9 Bolts	33 lbs.
R-6834	1x11 Bolts	34 lbs.
R-7534	1x8 Bolts	40 lbs.
R-7434	1x7 Bolts	40 lbs.
R-7734	1x10 Bolts	41 lbs.

For Square or Rectangular Bar



SH-4x4-1	14 lbs.	SH-5x7-2	17 lbs.
SH-4x4-2	16 lbs.	SH-5x7-3	21 lbs.
SH-4x4-3	19 lbs.	SH-6x8-2	20 lbs.
SH-4x7- 1	15 lbs.	SH-6x8-3	25 lbs.
SH-4x7-2	18 lbs.	SH-7x7-2	21 lbs.
SH-4x7-3	20 lbs.	SH-7x7-3	25 lbs.
SH-4x7-4	25 lbs.	SH-7x5-2	20 lbs.
		SH-7x5-3	24 lbs.

SHANK HOLDER EXTENSIONS

For Square or Rectangular Bar

Available for 1-1/4x3, 1x3, 3/4x2-1/2, or 5/8x2 Shanks



SH-4x4 Ext. 3-8" 30 lbs.
SH-4x4 Ext. 3-12" 34 lbs.
SH-4x7 Ext. 3-8" 32 lbs.
SH-4x7 Ext. 3-12" 36 lbs.

Extensions for other bar sizes also available


For 2-1/4" Diamond Bar



SH-3 Ext 8" 32 lbs.
SH-3 Ext 12" 35 lbs.


SHANK HOLDERS

For 2-1/4" Diamond Bar



SH-101	5/8x2" Shank	12 lbs.
SH-22	3/4x2-1/2" Shank	11 lbs.
SH-33	1x3" Shank	15 lbs.
SH-44	1-1/4x3" Shank	16 lbs.


For 3-1/2" to 4" Diamond Bar



SH-101-1/2	5/8x2" Shank	15 lbs.
SH-22-1/2	3/4x2-1/2" Shank	14 lbs.
SH-33-1/2	1x3" Shank	18 lbs.
SH-44-1/2	1-1/4x3" Shank	18 lbs.

ANGLE CLAMPS FOR 1X3 SHANKS

For 2-1/4" or 4" Diamond Bar

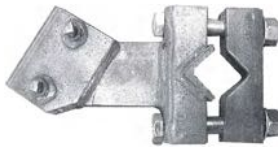

Please Specify Bar Size

AC-3-2-1/4 Diamond	30 lbs.
AC-3-4x4 Diamond	30 lbs.

For Square or Rectangular Bar



AC-3-4x4	28 lbs.	AC-3 7x5	32 lbs.
AC-3-4x7	29 lbs.	AC-3 7x7	33 lbs.
AC-3-5x7	30 lbs.	AC-3 6x8	32 lbs.

SPRING SHANK CLAMPS

SPRING TINE CLAMP



STC-44	8 lbs.
STC-47	8.5 lbs.

SPRING SHANK CLAMP



For 4x4 Bar

SS-14	5 lbs.
-------	--------

HOEME SHANK HOLDERS

For 2-1/4 Diamond Bar



HSH-1	10 lbs.
-------	---------

Standard for 4x4 or 4x7 Bars

Uses 1 7/8x7-1/2 Bolt
Uses 2 5/8x7-1/2 Bolts



HSH-4x4	12 lbs.
HSH-4x7	15 lbs.

Heavy Duty for 4x4 or 4x7 Bar

Uses: 4 - 3/4x9-1/2" Bolts
1 - 5/8x3-1/2" Bolts



HDH-4x4	21 lbs.
HDH-4x7	27 lbs.

HOEME SHANK HOLDERS

Spring Loaded

- Fits 4" Square, 4x7, or 7" Square Bar
- 1200 lbs. of Trip Force
- Super Heavy Duty Design
- 1-1/4" Bolts
- Heavy Duty Cast Cap
- Uncompressed Spring is 12"x 3-7/8" O.D. x 2-5/8" I.D. w/5/8" wire



SHSHHD-4X4	Fits 4" Square Bar	90 lbs.
SHSHHD-4X7	Fits 4x7 Bar	91 lbs.
SHSHHD-7x7	Fits 7" Square Bar	90 lbs.

- Fits a Wide Variety of Bar Sizes
- 650 lbs. of Trip Force
- 1" Bolts
- Uncompressed spring Is 14-1/2" x 3-1/2" O.D. x 2-1/2" I.D. w/9/16" wire



SHSH-1	Fits 2-1/4 Diamond Bar	67 lbs.
SHSH-4x4	Fits 4" Square Bar	61 lbs.
SHSH-4x7	Fits 4x7 Bar	62 lbs.
SHSH-5x7	Fits 5x7 Bar	64 lbs.
SHSH-7x7	Fits 7x7 Bar	65 lbs.

Holder for Stubble Mulchers, Badgers, Hook Badgers and Subsoil Shanks

Please Specify Bar Sizes and Spacing



Standard Holders


BSH-8-3x3-27" (Fits bars 24" overall width) 82 lbs.
 BSH-8-3x3-31" (Fits bars 28" overall width) 86 lbs.
3x3x1/2 Angles W/Bolts & Caps
 Uses 3/4" bolts to mount angles to bar
 Uses 3/4" bolts to mount shank to angles

Heavy Duty Holders

BSH-8-4x4-27" (Fits bars 24" overall width) 98 lbs.
 BSH-8-4x4-31" (Fits bars 28" overall width) 104 lbs.
4x4x1/2 Angles W/Bolts & Caps
 Uses 3/4" bolts to mount angles to bar
 Uses 3/4" bolts to mount shank to angles

Holder for Hook Badgers with 1" Holes and Razor Shank

Please Specify Bar Sizes and Spacing

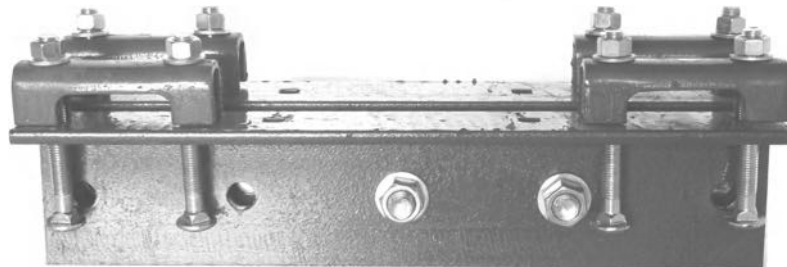

Extra Heavy Duty Holder

BSH-8-4x6-27" (Fits Bars 24" Overall Width) 92 lbs.
 BSH-8-4x6-31" (Fits Bars 28" Overall Width) 102 lbs.
4x6x1/2 Angles W/Bolts & Caps

Holder Uses 3/4" Bolts to Bolt Angles to the Bar
 Holder Uses 1" Bolts to Bolt Shank to Angles

PLOW TOOLS

Stubble Mulcher

Use clamp on Page 27



SM-4	W/36" Blade	95 lbs.
SM-4	W/42" Blade	98 lbs.

Stubble Mulcher

For 2-1/4 Diamond Bar



SM-1	W/36" Blade	123 lbs.
SM-1	W/42" Blade	126 lbs.

Razor Plow Shank

Use BSH-8 XL on Page 27

Use BSH-8-4x6 Angle clamp
Shown on page 26

1-1/4" x 8" Shank

Specify bar size and
distance between bars




RAZOR SHANK	W/48" Blade	160 lbs.
-------------	-------------	----------

Subsoil Shanks



SUB	84 lbs.
1" Thick Shank w/32" Clearance	
Replaceable Points and Shin on Page 44,45	
Use with BSH-8XL on Page 27	

Ripper Shank

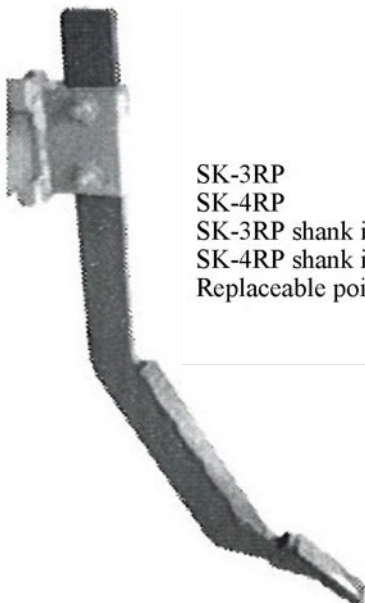

SK-3RP	42 lbs.
SK-4RP	54 lbs.
SK-3RP shank is 1x3"— 36" overall length	
SK-4RP shank is 1-1/4x3"—40" overall length	
Replaceable points &shins on page 44,45	

Ripper Shank

Available With Fertilizer Tube




SK-3RPF	42 lbs.
SK-4RPF	54 lbs.
SK-5RPF	53 lbs.
Sk-7RPF	63 lbs.

SK-3RPF shank is 1x3"— 38" overall length
SK-4RPF shank is 1-1/4x3"—38" overall length
SK-5RPF shank is 1x4"—38" overall length
SK-7RPF shank is 1-1/4x4"—38" overall length
Available with or without Fertilizer Tubes

Replaceable points &shins on page 44,45

PLOW TOOLS

Bedder Buster

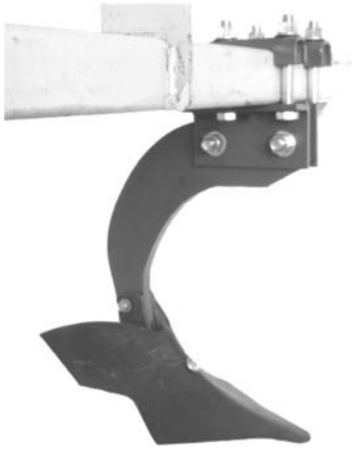

- 29" Clearance
 - 7-1/4" Wide Mounting Bracket for Superior Strength
 - All Mounting Bolts are Standard 1" Grade 2 Bolts that are Widely Available
 - Universal Mounting Bracket fits Most Standard Bar Sizes
 - Shank is Flame Cut Out of 1-1/4" Plate
 - Uses Nichols N-346 Furrower with 15" Bottom and 17" Wing
 - Uses Tripper for Furrower Support
 - Rod Weeder Attachment Available
 - Made in the U.S.A.
- SHOWN: BB-1** 124 lbs.

Available w/ Double Bar Clamp **BB-2**

Badger Claws




BAD 62 lbs.
1" Thick Shank w/26" Clearance
Replaceable points on page 45
Use BSH-8 or BSH-8XL

XL Badger Claw



BAD XL (1" Thick) 94 lbs.
BAD XXL (1-1/4" Thick) 125 lbs.
32" Clearance
Replaceable points & shins on page 44,45
Use BSH-8 or BSH-8XL Clamp
Adjustable Badger Claw Available with 10" of depth adjustment
Available drilled for **Big Ox Clamp**

Hook Badger

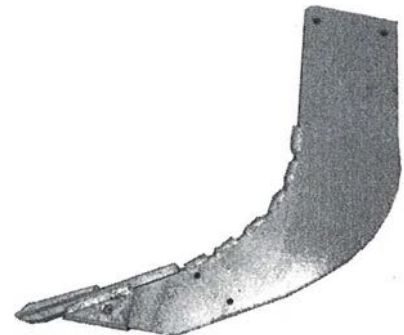

Hook Badger 102 lbs.
1-1/4" Shank with 32" Clearance
Available Drilled w/1" or 3/4" Holes
Replacement Points and Shin on Page 44,45
Use with BSH-8XL on Page 27
Adjustable Shank Available


SPRING SHANKS

S-Shanks



Field Cultivator
Shanks Also Fits Crustbuster, Noble, & others
7/16x1-3/4" material
S-450 shank has 18" clearance 8 lbs.
Order Clamp From Page 26
Replacement tips on Page 43

Spring Tine

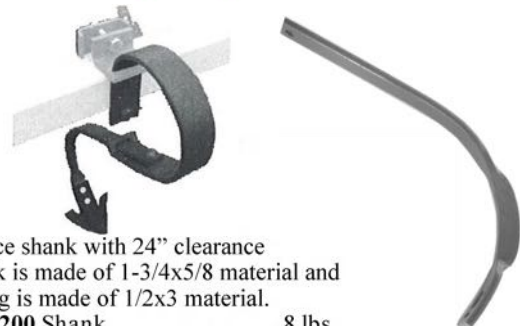

2 piece shank with 24" clearance
Shank is made of 1-3/4x5/8 material and
Spring is made of 1/2x3 material.
RC 1200 Shank 8 lbs.
RC 14751 Spring 14 lbs.
Order Clamp From Page 26
Shank Also fits other brands

ATTACHMENTS

Bed Master Disc Bedder Row



24" Cupped Disc Standard on 40", 38", & 36" rows
 22" Cupped Disc Standard on 30" rows
 Discs are Available in Smooth or Notched
 Large Greasable Tapered Roller Bearings
 Shank Mounted Behind Disc for Superior Trash Clearance
 Angled Shank with Tilted Disc
 Disk Easy to Replace
 Small Bearing # 25877
 Large Bearing # 25590
 Small Race # 25821
 Large Race # 25520
 Seal # 20148
 1 Row Bed Master Disc Bedder 228 lbs.

Heavy Duty Double Disc Bedder Row



20" & 22" Cupped Discs
 Notched Disc are Available
 1-1/2 Square Shaft
 Sealed Bearings
 No Rights or Lefts on
 any Part of Disc Bedder Row
 Bearing # DC 211 TT5
 1 Row HNB Heavy Duty
 Double Disc Bedder 286 lbs.

Double Disc Bedder Row



18" & 20" Cupped Discs
 1-1/8 Square Shaft
 Sealed Bearings
 No Rights or Lefts on
 any Part of Disc Bedder Row
 Bearing # DC 208 TT5
 1 Row NB Double Disc Bedder 252 lbs.

Root Rooter Row



24" or 28" Disc w/Welded Cleats Included or
 Available for purchase separately
 Large Greasable Tapered Roller Bearings
 Clamp Included (specify bar size)
 Slide in Spindle
 Disc Easy to Replace
 Small Bearing # 25877
 Large Bearing # 25590
 Small Race # 25821
 Large Race # 25520
 Seal # 20148
 1 Row Root Rooter 245 lbs.

ATTACHMENTS

Rear Stabilizer



ST-446 26 678

170 lbs.

Please Specify Tool Bar Size

4x4x1/4 44" Long

Available Extended 12" or 20"

5-Hole Available with 22", 24" or 26" Blade

6-Hole Available with 22", 24", 26" or 28"

Blade

Available Hubs: Q-719, Q-888, Q-783, Q-678

Q-783 or Q-678 Recommended for this Coulter

See Page 42 for Hub Ratings

Works Well on Listers, Planters and Cultivators

Will Also Work on Deep Furrows

This will work as an offset.

Stabilizer Spring Attachment Kit

Attaches on
ST-446



STSA-1

21 lbs.

Offbar

- 1-1/4 x 3 Shank
- Two 1-1/8 Bearings
#DC208TT5
- Adjustable Angle
- Available with or without
discs
- 18" or 20" Disc are
available
- 1 Row Includes a left and
right hand gang



Offbar Row

250 lbs.

Peel Off Disc

24" Disc
Large Greasable Tapered Roller Bearings
Clamp Not Included
SK-4 20" 1-1/4X3" Shank included
Slide in Spindle
Heavy Duty Hub
Disc Easy to Replace
Uses 5/8" Bolts to Attach to Shank
Adjustable Angle
Left & Right Side Price Separately
Small Bearing # 25877
Large Bearing # 25590
Small Race # 25821
Large Race # 25520
Seal # 20148



Weight 183 lbs.

Peel Off Disc

170 lbs.

Rolling Cultivator Gang



16" 5 Spider Gang w/Hardfaced Teeth
Right & Left Hand Gangs Available
Replaces Lilliston Rolling Cultivator Gang
Ag Smart Brand

H165LH
H165RH

62 lbs.

ATTACHMENTS

Bale Prongs

Holders Sold Separately



Roll-A-Cone Prong is Made out of 1-15/16" 1018 Cold Roll Shaft & is 58" Long




Forged Prong w/Hole in End is Made out of 1-5/8" Forged Steel & is 47" Long



Forged Prong w/Tapered End is Made out of 1-3/4" Forged Steel & is 49.5" Long



Rakes With Baskets

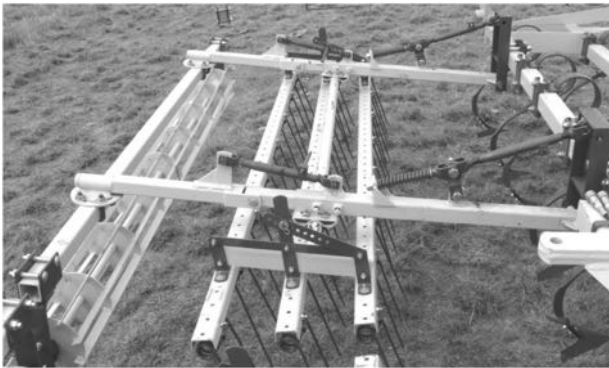

FEATURES


- Heavy Duty Spring ed Mounting Arms
- Baskets Adjust Separately from rakes
- Simple Turnbuckle Adjustment on Rakes and Baskets
- 1-7/16 Pillar Block Bearings
- Provides Smoother Finish than Rakes Alone
- Helps Break Clods and Conserve Moisture
- Fits Most Brands of Implement (Specify Bar Size)

Load-

AVAILABLE SIZES

5'4"
6'8"
8'
9'4"
10'8"
12'
13'4"

Rake Attachments

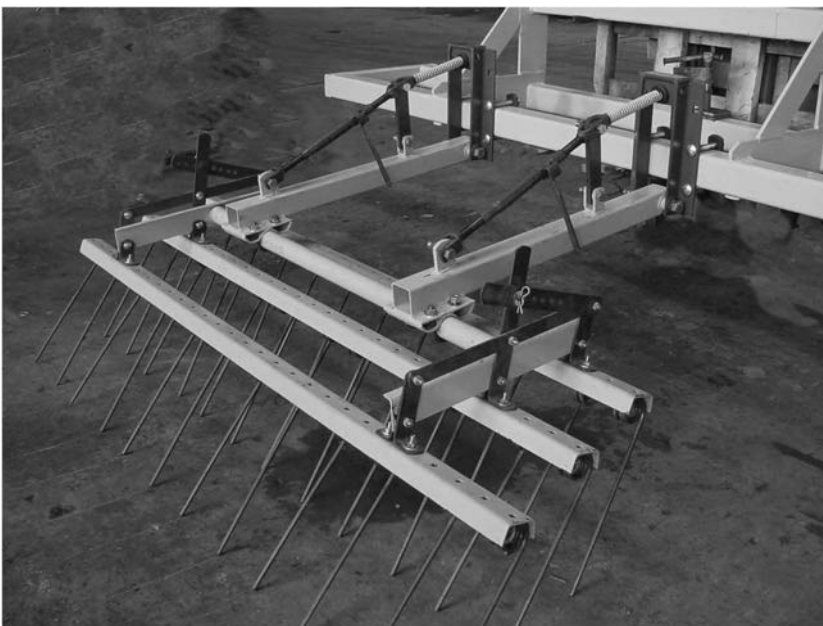


Available Lengths	2 Bar Weight	3 Bar Weight
5'4"	226 lbs.	260 lbs.
6'8"	252 lbs.	296 lbs.
8'	274 lbs.	328 lbs.
9'4"	296 lbs.	358 lbs.
10'8"	312 lbs.	382 lbs.
12'	336 lbs.	416 lbs.
13'4"	352 lbs.	440 lbs.
14'8"		484 lbs.

16" & 32" Extensions Available
Double Arms
Recommended
6'8" & Longer

Teeth are made of 7/16" spring wire

ATTACHMENTS

Spring Loaded Baskets

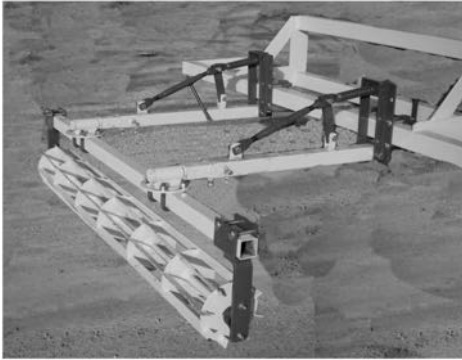

- Heavy Duty Spring Loaded Mounting Arms
- 1-7/16 Pillar Block Bearings
- Simple Turnbuckle Adjustment
- Helps Break Clods and Conserve Moisture
- Fits Most Brands of Implement
- Specify Bar Size

AVAILABLE SIZES

5'	400 lbs.
6'4"	435 lbs.
7'8"	470 lbs.
9'	505 lbs.
10'4"	540 lbs.
11'8"	570 lbs.
13"	610 lbs.


Rotary Treaders

(Bearing FD209RA)

Wheels can be replaced individually

Wheels are 19" in diameter

5' Treader	388 lbs.
6' Treader	426 lbs.
7' Treader	458 lbs.
8' Treader	490 lbs.
9' Treader	520 lbs.
10' Treader	554 lbs.

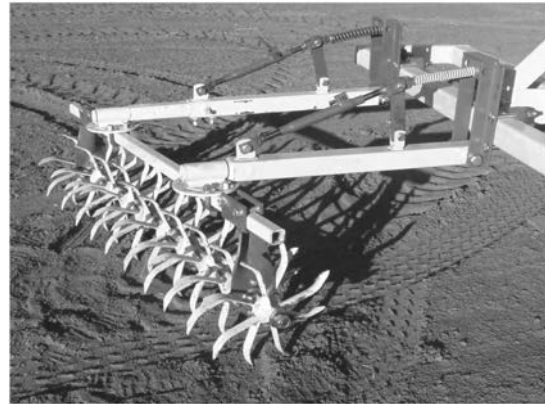


R-501T Rake Teeth

- 19" Overall Length
- Clamp Sold Separately
- 7/16" Wire

R-501T

3.5 lbs.



NGH-17 Rake Teeth

- 19" Overall Length
- Clamp Sold Separately
- 3/8" Wire

NGH-17

2.75 lbs.



RK-2 Rake Teeth

- 19" Overall Length
- Clamp Sold Separately
- 3/8" Wire


RK-2

2.75 lbs.



ATTACHMENTS

Rake Extension

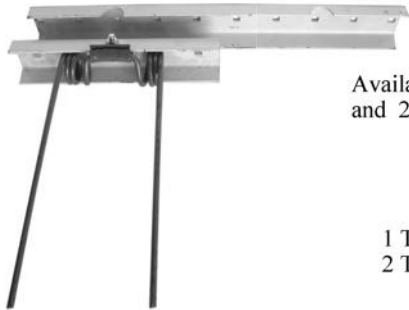

Available in 1 Tooth
and 2 Tooth extensions

1 Tooth	19 lbs.
2 Tooth	25 lbs.

Wire Weeders

Mounting Bracket
Not Available

Rights and Lefts

Wire Weeders Pair 1 lbs.




Rod Weeders Knife Head

Large Shown

Used to Adapt BS-28
Knives To Rod Weeder

Will Fit 1x3 Shank or
1-1/4x3 Shank



KHRW-1 Large	38 lbs.
KHRW-2 Small	26 lbs.

Knife Heads

Used to Adapt
BS-28 Knives
To Straight
Shanks



KH-3 Fits 1x3 Shank	22 lbs.
KH-4 Fits 1-1/4x3 Shank	23 lbs.

Beet Knife Holders



BKH-1	5/8x2" Shank	12 lbs.
BKH-2	3/4x2-1/2" Shank	16 lbs.
BKH-1 Offset	5/8x2" Shank	12 lbs.
BKH-2 Offset	3/4x2-1/2" Shank	16 lbs.

Rod Weeder Attachment Bracket For Bedder Buster

- Attaches to Bedder Buster or Other
High Clearance Lister Shanks
- Slotted to Allow Variable
Depth Adjustment



BBRW-1 9 lbs.

Rod Weeder Motor Hanger Bracket

- Allows Hydraulic Motor to be
Ran Inline with Rod Weeder Rod
- Mounts on a 1x3 Shank
- Available in a Right Hand or Left
Hand Mount
- Motor Mount Plate Sold
Separately



NRW-18 27 lbs.

Rod Weeder Bearing Bracket

- Used to Mount Rod Weeder Rod
to 1x3 Shank
- Can be Used Inline with NRW-18
Motor Hanger Bracket



RW-8 19 lbs.

Rod Weeder Motor Hanger Bracket 12" Extension

- Places the Rod Weeder
Rod Approximately
12" from Rear of 1x3
Shank
- Motor Mount Plate
Sold Separately



NRW-18B 39 lbs.

ATTACHMENTS

Rod Weeder Bearing Bracket 12" Extension

- Rod Weeder Bearing Bracket Extended 12" Behind Rear of Shank
- Used with 12" Extended Motor Hanger Bracket



RW-8B 23 lbs.

Dirt Pusher

- Mounted on 3/4x2-1/2 Shank
- 20" Wide, 8" Tall Wings



DIRT PUSHER 24 lbs.

Marker Disc Assembly

- Mounted on 1" Shaft
- Disc Measures 12" Diameter
- Used on All Roll-A-Cone Markers
- Bearing: 205PP11 or NCP100RPC



MP-12 15 lbs.

Marker Wheel

- Acts as a Small Gauge Wheel to relieve strain
- Uses same clamps as Disc assembly
- This Tire Measures 14" Diameter By 2" Wide V Shaped
- Also makes a mark
- Mounted on 1" shaft
- Bearing: 205PP11 or NCP100RPC



MP-12W 16 lbs.

Trash Whipper

- 3/4 x 2-1/2" Shank 26" Long
- 205PP11 Triple Seal Bearings
- Order Clamp from Page 25



Sk-2 TW 37 lbs.

Marker Gauge Wheel

- Use Clamp SH-2x2-1 to Mount tire on marker
- Light duty tire wheel & hub mounted on 5/8x2 Shank
- 4.80x8 Tubeless Tire



G-5 26 lbs.

Squirrel Cages

- Used for bed firming Before planting.
- 15" Width
- 12" Diameter
- 37-1/2" Circumference
- Bearing: NPS 100 RP



SQ CAGE 110 lbs.

Single Basket on 1x3 Shank

Spring Loaded on Rubber Torsion Axle

- Mounts to Bar with 1x3 Shank Holder
- Available with 15" or 19" Slats
- 33" Circumference
- SA208-20 Bearing
- Available with Squirrel Cage
- No Wear Points
- 1-1/4" Shaft



SINGLE BASKET 15" SLT 59 lbs.

ATTACHMENTS

Single Baskets




Baskets are used for incorporating and bed firming before planting
12", 15" or 19" Blades— 10-1/2 Diameter— 33" Circumference
Bearings: NPS 100 RP

The Single Basket has
27" of Clearance from
The Back of the Bar
To the Front of the Basket

SINGLE BASKET

96 lbs.

Double Baskets

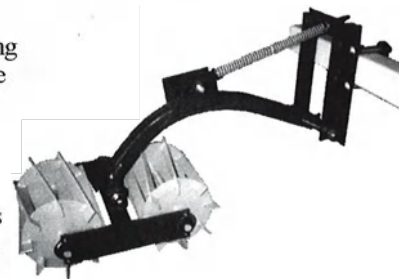

The Double Basket has
16" of Clearance from
the Back of the Bar to
the Front of the Basket

DOUBLE BASKET

138 lbs.

Single Curved Basket

- 10-1/2" Diameter
- 33" Circumference
- 12" Curved Blades
- Adjustable Height
- NPS 100 RP Bearings
- Great for Strip Till



Single Curved Basket

90 lbs.

Single Rubber Torsion Basket

- 14" Diameter Basket
- Spring Loaded w/Rubber Torsion Axle
- Can be used as Offset
- 1-1/4" Flange Bearing #FTFH206-20
- Adjust Height w/Turnbuckle
- 24" & 42" Extension Available



Basket SLT 15 EXT 24 130 lbs.

Curved Shank Adjustable Spindle Ridged Coulter

- Complete with 17 or 20" Blade
- Q 719 5-Bolt Hub (see page 42 for Specs.)
- 30" 1x3" Shank
- Adjustable Offset
- Order Clamp from Page 25




SK-3C-A 5-Hole 17" 53 lbs.
SK-3C-A 5-Hole 20" 59 lbs.

CURVED SHANK

Consists of:

- Single curved 1x3" shank
- 5-Bolt hub rated at 2760 lbs.
- 5-1/2" Bolt circle, 4" pilot
- Can be used for Gauge Wheel, Coulter or Stabilizer

SK-3C Weight 48 lbs.

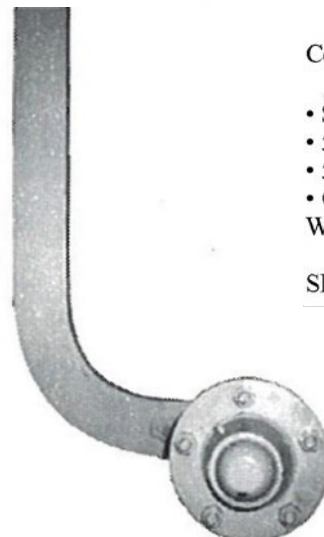


ATTACHMENTS

Spring Loaded Swivel Coulter With Fertilizer Knife

Shown with back swept knife


- Complete with 17 or 20" Blade
- Q 719 5-Bolt Hub (see page 42 for Specs.)
- 20" 1x3" Shank
- Order Clamp from Page 25
- Order with Back Swept or Forward Swept Knife

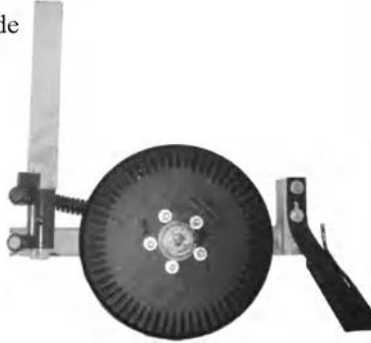

CBS-1SSLF 5-Hole 17" 94 lbs.
CBS-1SSLF 5-Hole 20" 100 lbs.

Straight Shank Angle Shaft Swivel Coulter

- Complete with 17 or 20" Blade
- Q 719 5-Bolt Hub (see page 42 for Specs.)
- 20" 1x3" Shank
- Clamp Not Included
Order Clamp from Page 25

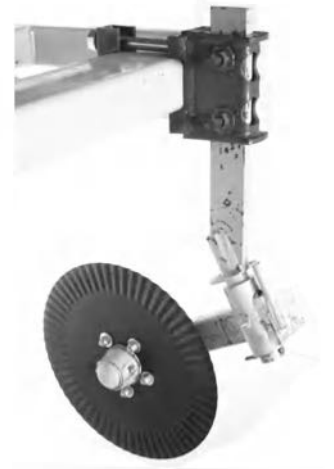

CBS-1SA 4-Hole 17" 49 lbs.
CBS-1SA 5-Hole 20" 75 lbs.

Straight Shank Angle Shaft Spring Loaded Swivel Coulter


- Complete with 17 or 20" Blade
- Q 719 5-Bolt Hub (see page 42 for Specs.)
- 20" 1x3" Shank
- Clamp Not Included
Order Clamp from Page 25



CBS-1SSLA 4-Hole 17" 57 lbs.
CBS-1SSLA 5-Hole 17" 77 lbs.
CBS-1SSLA 5-Hole 20" 80 lbs.

Offset Shank Swivel Coulter

- Complete with 17 or 20" Blade
- Q 719 5-Bolt Hub (see page 42 for Specs.)
- 20" 1x3" Shank
- Clamp Not Included
Order Clamp from Page 25

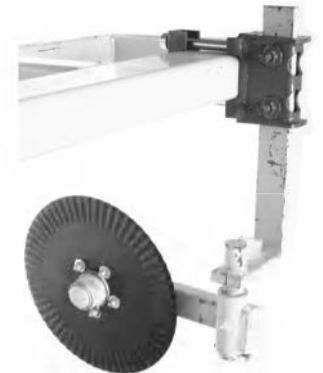

CBS-1S Offset 4-Hole 17" 57 lbs.
CBS-1S Offset 5-Hole 20" 84 lbs.

Offset Shank Spring Loaded Swivel Coulter

- Complete with 17 or 20" Blade
- Q 719 5-Bolt Hub (see page 42 for Specs.)
- 20" 1x3" Shank
- Clamp not Included
Order from Page 25



CBS-1SSL Offset 4-Hole 17" 65 lbs.
CBS-1SSL Offset 5-Hole 17" 85 lbs.
CBS-1SSL Offset 5-Hole 20" 91 lbs.

Straight Shank Adjustable Spindle Ridged Coulter

- Complete with 17 or 20" Blade
- Q 719 5-Bolt Hub (see page 42 for Specs.)
- 30" 1x3" Shank
- Adjustable Offset
- Order Clamp from page 25



CBS-1 ADJ 5-Hole 17" 52 lbs.
CBS-1 ADJ 5-Hole 20" 58 lbs.

ATTACHMENTS

Straight Shank Welded Spindle

Ridged Coulter

- Complete with 17 or 20" Blade
- Q 719 5-Bolt Hub (see page 42 for Specs.)
- 30" 1x3" Shank
- 7" Offset from Shank to Blade
- Clamp not Included Order from Page 25




CBS-1	4-Hole 17"	48 lbs.
CBS-1	4-Hole 20"	54 lbs.
CBS-1	5-Hole 17"	52 lbs.
CBS-1	5-Hole 20"	58 lbs.

Straight Shank Angle Clamp

Spring Loaded Swivel Coulter

- Mounted On 1x3 Shank
- Uses Angle Clamp (Not Included)
- Available with 4 Hole or 5 Hole Hub

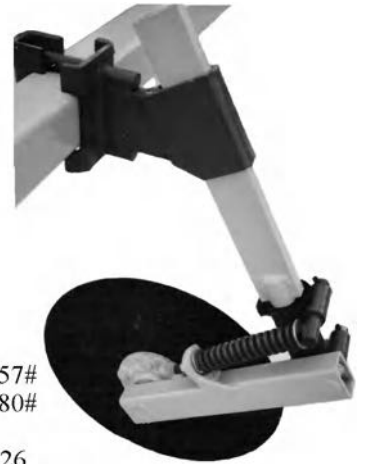

Complete with 17" or 20" Blade

CBS-1SSL	4-Hole 17"	Wt 57#
CBS-1SSL	5-Hole 20"	Wt 80#

Order Shank Holder From Page 26

Straight Shank Angle Clamp

Swivel Coulter

- Mounted On 1x3 Shank
- Uses Angle Clamp (Not Included)
- Available with 4 Hole or 5 Hole Hub

Complete with 17" or 20" Blade

CBS-1S	4-Hole 17"	Wt 49#
CBS-1S	5-Hole 20"	Wt 75#

Order Shank Holder From Page 26



Barring Off Disc

14" Disc
Greasable Hub with Tapped Roller Bearings



VDH-1S 17 lbs.
Order Straight Shank from Page 30

Single Plow Stands

- 2x2x.188 wall Tube is 48" Long
- Clamp is included
- Specify Bar Size
- Can be Raised and Pined out of the way when not in use
- Adjustable Height



Single Plow Stand

Wt 34#

Double Plow Stands

- 2x2x.188 wall Tube is 48" Long
- Great for Single Bar Plows
- Specify Bar Size
- Can be Raised and Pined out of the way when not in use
- Adjustable Height




Double Plow Stand

Wt 70#

ATTACHMENTS

Stubble Mulcher Frog



SM-5 43 lbs.
Fits SK-3
Order Straight Shank from Page 30

Replacement Jacks



- | | | |
|------|---|---------|
| J-1 | 17" Closed Pin Centers
3/4" Pin Holes, 1" Screws | 9 lbs. |
| J-2 | 20" Closed Pin Centers
1" Pin Holes, 1-1/8" Screws | 12 lbs. |
| *J-3 | 20" Closed Pin Centers
1" Pin Holes, 1-1/4" Screws | 16 lbs. |
- *This Jack has an adjustment lock

S-Crank

Crank used on Early Model Roll-A-Cone Gauge Wheels




S-5 11.5 lbs.

Sliding Fender

Available with Offset Shank

Mounted on 5/8x2" Shank

Length: 36"
Height: 9"
Width: 6-1/2"

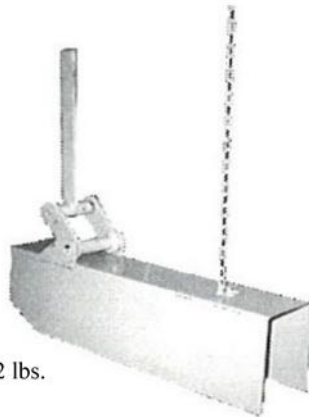

SLIDING FENDER 42 lbs.

Rolling Fender

Mounted on 5/8x2" Shank

Also Available with 3-1/2" Offset Shank



ROLLING FENDER 44 lbs.

Mini Picker

- 20" Diameter Wheels
- 2 arms w/4 wheels
- 8" wide, 2-1/2" centers
- Available with centered or Offset Shank
- Mounted on 3/4x2-1/2" Shank
- Bearing: 203KRR2



MINI PICKER Wt 82#

Maxi Picker


- 20" Diameter Wheels
- 4 Arms with 4 Wheels
- Unit is 15" Wide
- Available with centered or Offset Shank
- Mounted on 1x3 Shank
- Bearing: 203 KRR2



MAXI PICKER Wt 103#


SHANKS

Straight Shanks

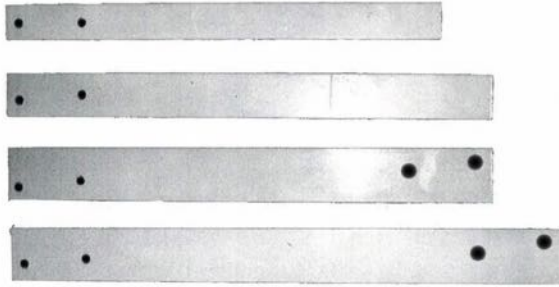

SK-1	5/8x2x30"	10 lbs.
SK-2	3/4x2-1/2x30" drilled 1/2"	16 lbs.
SK-3 30"	1x3x30" drilled 1/2" & 5/8"	25 lbs.
SK-3 36"	1x3x36" drilled 1/2" & 5/8"	30 lbs.
SK-4 34"	1-1/4x3x34" drilled 1/2" & 5/8"	36 lbs.
SK-5 34"	1x4x34" drilled 5/8"	40 lbs.
SK-7 34"	1-1/4x4x34" drilled 5/8"	51 lbs.

Hoeme Shank

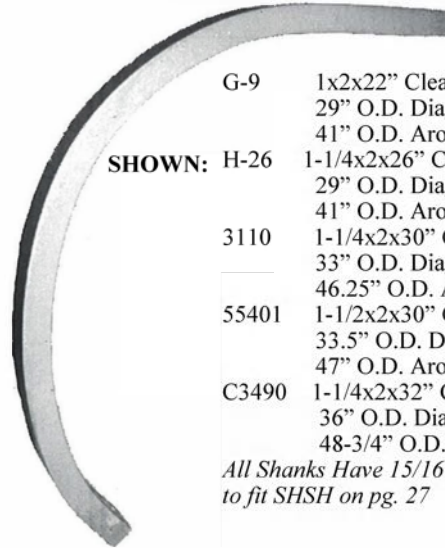

G-9	1x2x22" Clearance	21 lbs.
	29" O.D. Diagonal	
	41" O.D. Around the Back	
SHOWN: H-26	1-1/4x2x26" Clearance	26 lbs.
	29" O.D. Diagonal	
	41" O.D. Around the Back	
3110	1-1/4x2x30" Clearance	30 lbs.
	33" O.D. Diagonal	
	46.25" O.D. Around the Back	
55401	1-1/2x2x30" Clearance	36 lbs.
	33.5" O.D. Diagonal	
	47" O.D. Around the Back	
C3490	1-1/4x2x32" Clearance	33 lbs.
	36" O.D. Diagonal	
	48-3/4" O.D. Around the Back	

All Shanks Have 15/16" Hole in top to fit SHSH on pg. 27

5" Rear Offset Shank

(or Forward Offset)
Drilled 1/2" Holes



SK-1 Rear Offset	5/8x2x27"	10 lbs.
SK-2 Rear Offset	3/4x2-1/2x30"	16 lbs.
SK-3 Rear Offset	1x3x36"	30 lbs.
SK-4 Rear Offset	1-1/4x3x34"	38 lbs.

5" & 7" Side Offset Shank

Drilled 1/2" Holes



SK-3 5" Offset	1x3x36"	35 lbs.
SK-3 7" Offset	1x3x36"	35 lbs.

3-1/2" Side Offset Shanks

Drilled 1/2" Holes



SK-1 Offset	5/8x2x30"	10 lbs.
SK-2 Offset	3/4x2-1/2x30"	17 lbs.
SK-3 Offset	1x3x36"	30 lbs.
SK-4 Offset	1-1/4x3x34"	38 lbs.


Footpieces

FP-1	1/4" Thick, Fits SK-1	4.5 lbs.
FP-2	5/16" Thick, Fits SK-2	5.5 lbs.
FP-3	3/8" Thick, Fits SK-3	6 lbs.
FP-3HDT	1/2" Thick, Fits SK-3	8 lbs.
FP-3AHD	1/2" Thick, Fits SK-3	9 lbs.
	Set Screw Adjuster	
FP-3HDT	1/2" Thick, Fits SK-3	8 lbs.
FP-4	1/2" Thick, Fits SK-4	8 lbs.
FP-4A	1/2" Thick, Fits SK-4	9 lbs.
	Set Screw Adjuster	
FP-4T	1/2" Thick, Fits SK-4	8 lbs.
	Slotted out to Trip (Avail. 1/2" or 5/8" Bolts)	

All Footpieces use 1/2" Bolts but the FP-3HDT and FP-4T Are available with 1/2" or 5/8" Bolts



Foot Piece Adaptor

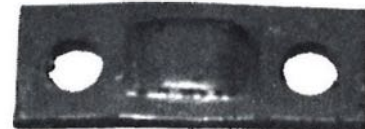

FPA-23	1/4 lbs.
Allows use of 1/2" Sweep bolt	
Takes Place of Washer	

ATTACHMENTS

Planter Guide

Mounted On
1x3 Shank

Order Angle or
Straight Clamp
From Page 25 or 26.

5-Hole Hubs



GW-40 Shown

GW-40 (Front Bar
Mount w/ Angle Clamp)
GW-41 (Rear Bar Mount w/ Angle Clamp)
GW-42 (Front or Rear Bar Mount w/
Straight Clamp)

GW-40

122 lbs.

Heavy Duty Planter Guide



**GW-50 Narrow
Bracket Shown**

Please Specify
Bar Size
When Ordering

Comes Complete
With Clamps
Available with wide or narrow
mounting bracket.
5-Hole Hubs
GW-50

207 lbs.

Spring Loaded Heavy Duty Planter Guide



**GW-50S Wide
Bracket Shown**

Please Specify
Bar Size
When Ordering

Comes Complete
With Clamps
Available with wide or narrow
mounting bracket
5 Hole Hubs
GW-50S

202 lbs.

Cone Guide Wheel

Mounted on
1x3 Shank

Order Angle Clamp
for GW-20 From
Page 26.

Order Straight Clamp
For GW-22 from
Page 25.

5-Hole Hub



GW-20 66 lbs.
GW-22 66 lbs.

Double Cone Guide Wheel Angled Down

Mounted on 1x3 Shank
Spring Loaded w/Rubber
Torsion Axle
1-1/4" Shaft & Bearing

Order Clamp from Page
25

Bearing: HCTFS 206-20

GW-20DASLT 114 lbs.



Double Cone Guide Wheel

Mounted on
1x3 Shank

Order Clamp from
Page 25.
Bearing: HCFTS
206-20

GW-20D 116 lbs.



Heavy Duty Barring Off Disc

- Mounted on 1x3 Shank
- 360 Degrees Adjustment
- 16" Disc Standard
- 18" Disc Available
- 2 1-1/8 Square Bore Bearings
- Bearing #DC 208 TT5
- Clamp Not Included



VDH-1 HD

51 lbs.

Double Barring Off Disc

- Available with 14" Notched
Discs or 14" Plain Disc
- Mounted on 20" 1x3" Shank
- Disc Bracket Slide In and Out
- Discs Rotate 360 Degrees
- Uses a Hub with 2 Tapered Roll-
er Bearings on Each Disc
- Wide & Narrow Bracket
Available

VDH-1D 86 lbs.
Order Shank Holder from Page 25



ATTACHMENTS

6 Hole Stub Assembly



Q 783 (6" Bolt Circle & 4.62" Pilot)
Capacity 4570#
Spindle Diameter 1-3/4
Small Bearing LM 67048
Large Bearing LM 501349
Small Race LM 67010
Large Race LM 501310
Seal C/R 17702
T-3-783 24 lbs.

Heavy 6 Hole Stub Assembly



Q 678 (6" Bolt Circle & 4.62" Pilot)
Capacity 5500#
Spindle Diameter 2-1/16"
Small Bearing 25877
Large Bearing 25590
Small Race 25821
Large Race 25520
Seal C/R 20148
Dust Cap & Seal Retaining Washer
Grease Zerk is on Dust Cap
Same Bearings as 8-hole Q-778
T-3-678 30 lbs.

4 Hole Stub Assembly

Q 669 (5" Bolt Circle & 3.62" Pilot)
Capacity 1500#
Spindle Diameter 1-5/8
Available Slide in or Bolt on
Small Bearing LM 11949
Large Bearing LM 67048
Small Race LM 11910
Large Race LM 67010
Seal C/R 14975
T-3-669-S (*Slide in*) 12 lbs.
T-3-669-B (*Bolt on*) 15 lbs.



5 Hole Stub Assembly

Q 719 (5-1/2" Bolt Circle & 4" Pilot)
Capacity 2760#
Spindle Diameter 1-3/4
Available Slide in or Bolt on
Small Bearing LM 67048
Large Bearing LM 48548
Small Race LM 67010
Large Race LM 48510
Seal C/R 15190
T-3-719-S (*Slide in*) 18 lbs.
T-3-719-B (*Bolt on*) 21 lbs.



6 Hole Stub Assembly

Q 888 (6" Bolt Circle & 4.62" Pilot)
Capacity 3600#
Spindle Diameter 1-3/4
Available Slide in or Bolt on
Small Bearing LM 67048
Large Bearing JL 69349
Small Race LM 67010
Large Race JL 69310
Seal C/R 16289
T-3-888-S (*Slide in*) 17 lbs.
T-3-888-B (*Bolt on*) 20 lbs.



8 Hole Stub Assembly

Q 778 (8" Bolt Circle & 6" Pilot)
Capacity 4910#
Spindle Diameter 2-1/8
Small Bearing 25877
Large Bearing 25590
Small Race 25821
Large Race 25520
Seal C/R 20148
T-3-778 37 lbs.



Heavy 8 Hole Stub Assembly

Q 848 (8" Bolt Circle & 6" Pilot)
Capacity 8000#
Spindle Diameter 3" or 3-5/8" (*Please Specify*)
Also Available w/2-1/4" Spindle to Fit a Sunflower Disc
Small Bearing 3585
Large Bearing 39581
Small Race 3525
Large Race 39520
Seal C/R 35062
T-3-848 65 lbs.



Sweep Buffer Wing



Sweep BW LRG

2.5 lbs

REPLACEMENT SWEEPS AND BLADES

Hoeme Chisels

Chromed Cap Chisel

H342CP 6.4 lbs.

HS13CP 7.2 lbs.

Double Ended Chisel

28 Plain 5 lbs.

Twisted Chisel Hard faced

SL124HF left hand 13 lbs.

SR124HF right hand 13 lbs.



Duckfoot Sweeps



CS-6 1/2x2-2-1/2 Bolts 3.5 lbs.

HC8-2HF 8" Duckfoot 4.0 lbs.

Tipper

Use a 2-1/4 Tipper w/15SQ Lister Bottom or a 346 Tipper w/ 346 Lister Bottom

(Helps Support Lister Bottom)

2-1/4 Tipper 3 lbs.

346 Tipper 3 lbs.



Hoeme Sweeps



HC26F-2HF 26" 1/2x3" Bolts

16 lbs.

HC16AA-2HF 1/2x2-1/2" Bolts

7 lbs.

HC18AA-2HF 1/2x2-1/2" Bolts

8 lbs.

4718-2HF 1/2x2-1/2" Bolts

8 lbs.

HC12-2HF 1/2x2-1/2" Bolts

6 lbs.

S-Shank Sweep



STS-4 4" Sweep
CC9A7HF 9" Sweep



2 lbs.
2.5 lbs.

S-Shank, Spring Time Replacement Points



CB-1 for S-Shank 2 lbs.
CC37 for Spring Time Shank 2 lbs.

Stubble Mulcher Blades



Razor Sweep 48" Shown

We also Stock 5', 5-1/2', 6', and 7' Blade Plow Blades

40 lbs.



SMS 36"
SMS 42"


We also Stock Blades for S&S and Hamby

17 lbs.
20 lbs.

Fluted Coulter Blades


Each Blade Available in 4 or 5 Hole

17" Blade 9 lbs.
20" Blade 15 lbs.



4-Hole blades have 5" bolt circle & 3.62" pilot
5-Hole blades have 5.5" bolt circle & 4" pilot

Plain Blades



22" Blade 4 or 5 Hole 20 lbs.
24" Blade 5 or 6 Hole 23 lbs.
26" Blade 5 or 6 Hole 37 lbs.
28" Blade 5 or 6 Hole 39 lbs.

30" Blade 5 or 6 Hole
4-Hole blades have 5" bolt circle & 3.62" pilot
5-Hole blades have 5.5" bolt circle & 4" pilot
6-Hole blades have 6" bolt circle & 4.62" pilot

REPLACEMENT SWEEPS AND BLADES

Lister Bottoms

Use 346 with Tipper on
Bedder Buster on Page
29

11WSQ 11" 7 lbs.

15SQ 15" 13 lbs.

346 15" 13 lbs.



Guide Wheel Replacement Blade

Available in 5 and 6 Hole
1/4" material on 5 and 6 hole
20- 1/2" Diameter



GW Cone Only

5-Hole Blades have 5.5" bolt circle & 4" Pilot 27 lbs.

6-Hole Blades have 6" bolt circle & 4.62" Pilot 27 lbs.

Knife Attachments For Badger

Attaches to
•Subsoil Shank
•Badger Claws
•Hook Badger
•9/32" Thick is
Standard
•1/2" Thick
Heavy Duty
Available
Please Specify
Roll-A-Cone
Or Hamby




BS-28

13 lbs. per Pair

Chisel Point Attachment For Stubble Mulcher

Bolts to Stubble
Mulcher Frog
Shown on Page 28

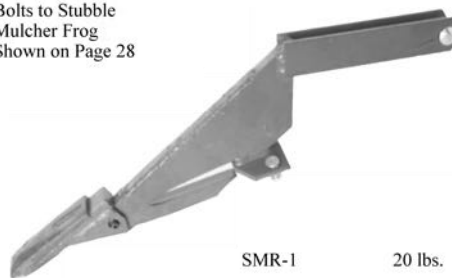

SMR-1

20 lbs.

REPLACEMENT SHINS

Replacement Shins For Standard or XL Badgers



Replace-Shin-ST 1"x20" (Hardfaced)
3 lbs.

Replace-Shin-XL 1"x26" (Hardfaced)
4 lbs.

Chromium Carbide Replacement Shins For All Curved Ripper Shanks



This will fit the
Standard Badger
XL Badger
Hook Badger

1"x9" (will cover up to 10") 2 lbs.

1-1/4"x14" (will cover up to 19") 2.5 lbs.

Replacement Shins For Razor and Subsoil Shank



Replace-Shin-Sub
Chromium Carbide
1-1/2"x14-3/4"
3.5 lbs.



Replace-Shin-Razor
Chromium Carbide
1-1/2"x7"
2 lbs.

REPLACEMENT POINTS

For 1" Thick Shank



M-8001(Poured Chromium Carbide 2-1/4" wide) 3.5 lbs.
M-8001DF (Poured Chromium Carbide with Dorsal Fin 2" wide) 5 lbs.

For Big Ox



M-30 Big Ox (2-1/4" Wide with Chromium Carbide Cap) 4.5 lbs.

For Hook Badger Fits 1-1/4" Thick Shank



Will Fit Some John Deere Shanks
M-60 (2-1/2" Wide w/Chromium Carbide Cap) 9 lbs.

Hoeme Shank Wear Shield



H-26 Wear Shield 1/3 lbs.

Badger Weld On Repair Tips



RT-1 Badger 3 lbs.
RT-2 Big Ox 6.5 lbs.
RT-3 Subsoil 5 lbs.
RT-4 Hook Badger 4 lbs.
RT-5 Sk-3Rp 4 lbs.

Replacement Points For 1" Thick Badger Shanks



M-30 Plain (1-1/2" Wide) 3 lbs.
M-30 Hardfaced (1-1/2" Wide) 3 lbs.
M-30 CC Narrow (1-7/8" Wide With Chromium Carbide Cap) 3.8 lbs.
M-30 CC (2-1/4" Wide with Chromium Carbide Cap) 4.5 lbs.
M-30 CCWA (2-1/4" Wide with Wrap Around Nose Chromium Carbide Cap) 5 lbs.

FERTILIZER EQUIPMENT

Fertilizer Knife Adapters

Adapters bolted on
1x3x20" shank or
1-1/4x3x20" shank

Adapters also fit our
30" shank



AHSK-3 (Adapter w/ Shank) 27 lbs.
AHAD-3 (Adapter Only) 10 lbs.

Fertilizer Knives Fits AHSK-3 Shank



AH-172 (on left) 5 lbs.
AH-172BS (on right) 5 lbs.

Light Duty Nurse Tank Hitch



21" In between Legs
25-1/5 Overall Width

NH 52 lbs.

FERTILIZER EQUIPMENT


Heavy Nurse Tank Hitch

Ridged Tongue with Swivel Ball

- Multi Direction:
Forward & sideways movement
- 18" Between mounting arms
- 28" Wide at bar
- 8" of slide 31" Pin center to bar
in pull position
- Available in 4", 5", and 7" vertical bar
size (*Horizontal bar size determined
by bolt length*)

HNH

118 lbs.

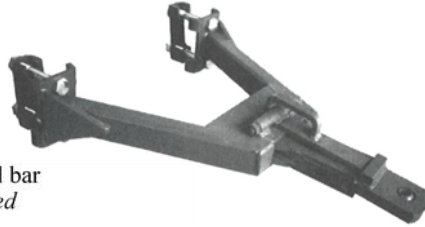

Heavy Nurse Tank Hitch

With Floppy Tongue




HNHF

118 lbs.

B-9500 Metermatic

Shown with Bracket
Super Flow

- Built in Hydraulic
Actuator
 - Single Dial Setting
 - Dial Calibrated in lbs.
N per hour
 - Up to 6500 lbs per hour
 - Calibrated @ 100#
tank pressure
- Order Bracket Separately



B-9500

B-9500 Bracket

13 lbs.

9 lbs.

C-4103 RPR Metermatic

Shown with Bracket

- Single Dial Setting
 - Dial Calibrated in lbs.
N per hour
 - Up to 4000 lbs. per hour
 - Calibrated @ 100 lbs.
tank pressure
- Order Bracket Separately



C-4103

C-4103 Bracket

10 lbs.

9 lbs.

Hydraulic Actuator



Hydraulic Actuator

3 lbs.

Manifold

For Metermatic —
Specify # of outlets



Manifold

6 lbs.

Connector Kit

Used to connect Metermatic
To quick coupler

- Consists of:
- 3' of 1" Hoses
 - 2 1" Hose Ends
 - 1 Tank Adapter
 - 1 1" Heavy Duty
Coupling



Connect Kit

6 lbs.

Breakaway Coupler

Shown with bracket



Breakaway Coupler
Breakaway Bracket

7 lbs.
6 lbs.

HARVESTING ATTACHMENTS

Corn Lifters



- Very effective in down corn
- Works virtually in all conditions
- Does not interfere with standing crops
- Field tested
- Beater attachment available
- Light weight, but strong
- Attaches to most headers
- Simple to operate

Corn lifter End Cones



- Lifts and separates tangled outside rows
- Hydraulically driven with motor on each end
- Attaches to most headers

ROLL-A-CONE MFG. CO.

7655 Roll-A-Cone Rd.

Tulia, TX 79088

Phone: 806-668-4722 Fax: 806-668-4725 Web Page: www.roll-a-cone.com E-mail: rollcone@roll-a-cone.com

If Taking I-27 South From Amarillo

- Take exit 83 (FM 2698) and cross back over the over-pass heading east
- Go East 4 miles on FM 2698
- Turn right (South) onto FM 146 and go 3 miles
- Turn left (East) at the Roll-A-Cone sign and go 2-1/2 miles on Roll-A-Cone Road

If Taking I-27 North From Lubbock

- Take exit 74 and go East on Hwy 86 to FM 146
- Turn left (North) on FM 146 and go 4 Miles
- Turn right (East) at the Roll-A-Cone sign and go 2-1/2 miles

*See Roll-A-Cone Mfg. or
Your Roll-A-Cone Dealer
for all your Farm
Equipment Needs*

